



Jakob® INOX LINE

N₂

SINCE 1904

© **Copyright by**

Jakob AG
CH-3555 Trubschachen
Switzerland 1988 / 2019

Technical data subject to change.

© **Copyright by**


Atelier Jakob AG/SA, Switzerland

Idea / Conception

Atelier Jakob AG/SA, Hannee Jakob SGD
CH-1783 Barberêche, Switzerland

Pliable, transparent grid structures made of stainless steel rope from the Jakob® INOX LINE series are **multifunctional and durable**: mounted on railings or in staircases, they provide **support and guidance**; on façades, they can be used as **training systems** for plants; in large rooms, they will create subtle accents as **filigreed partitions**. The Jakob® INOX LINE **Webnet** was subjected to numerous tests and complies with all applicable standards: As a permanent **protective and safety net** for bridges or observation platforms, it is absolutely UV- and weather-resistant, unlike conventional knotted plastic fiber nets.

The Jakob® INOX LINE **Webnet** has the skin-like characteristics of a diaphragm. It can form a plane surface but can also be tensioned into three-dimensional forms featuring funnel-type, cylindrical, or spherical shapes.

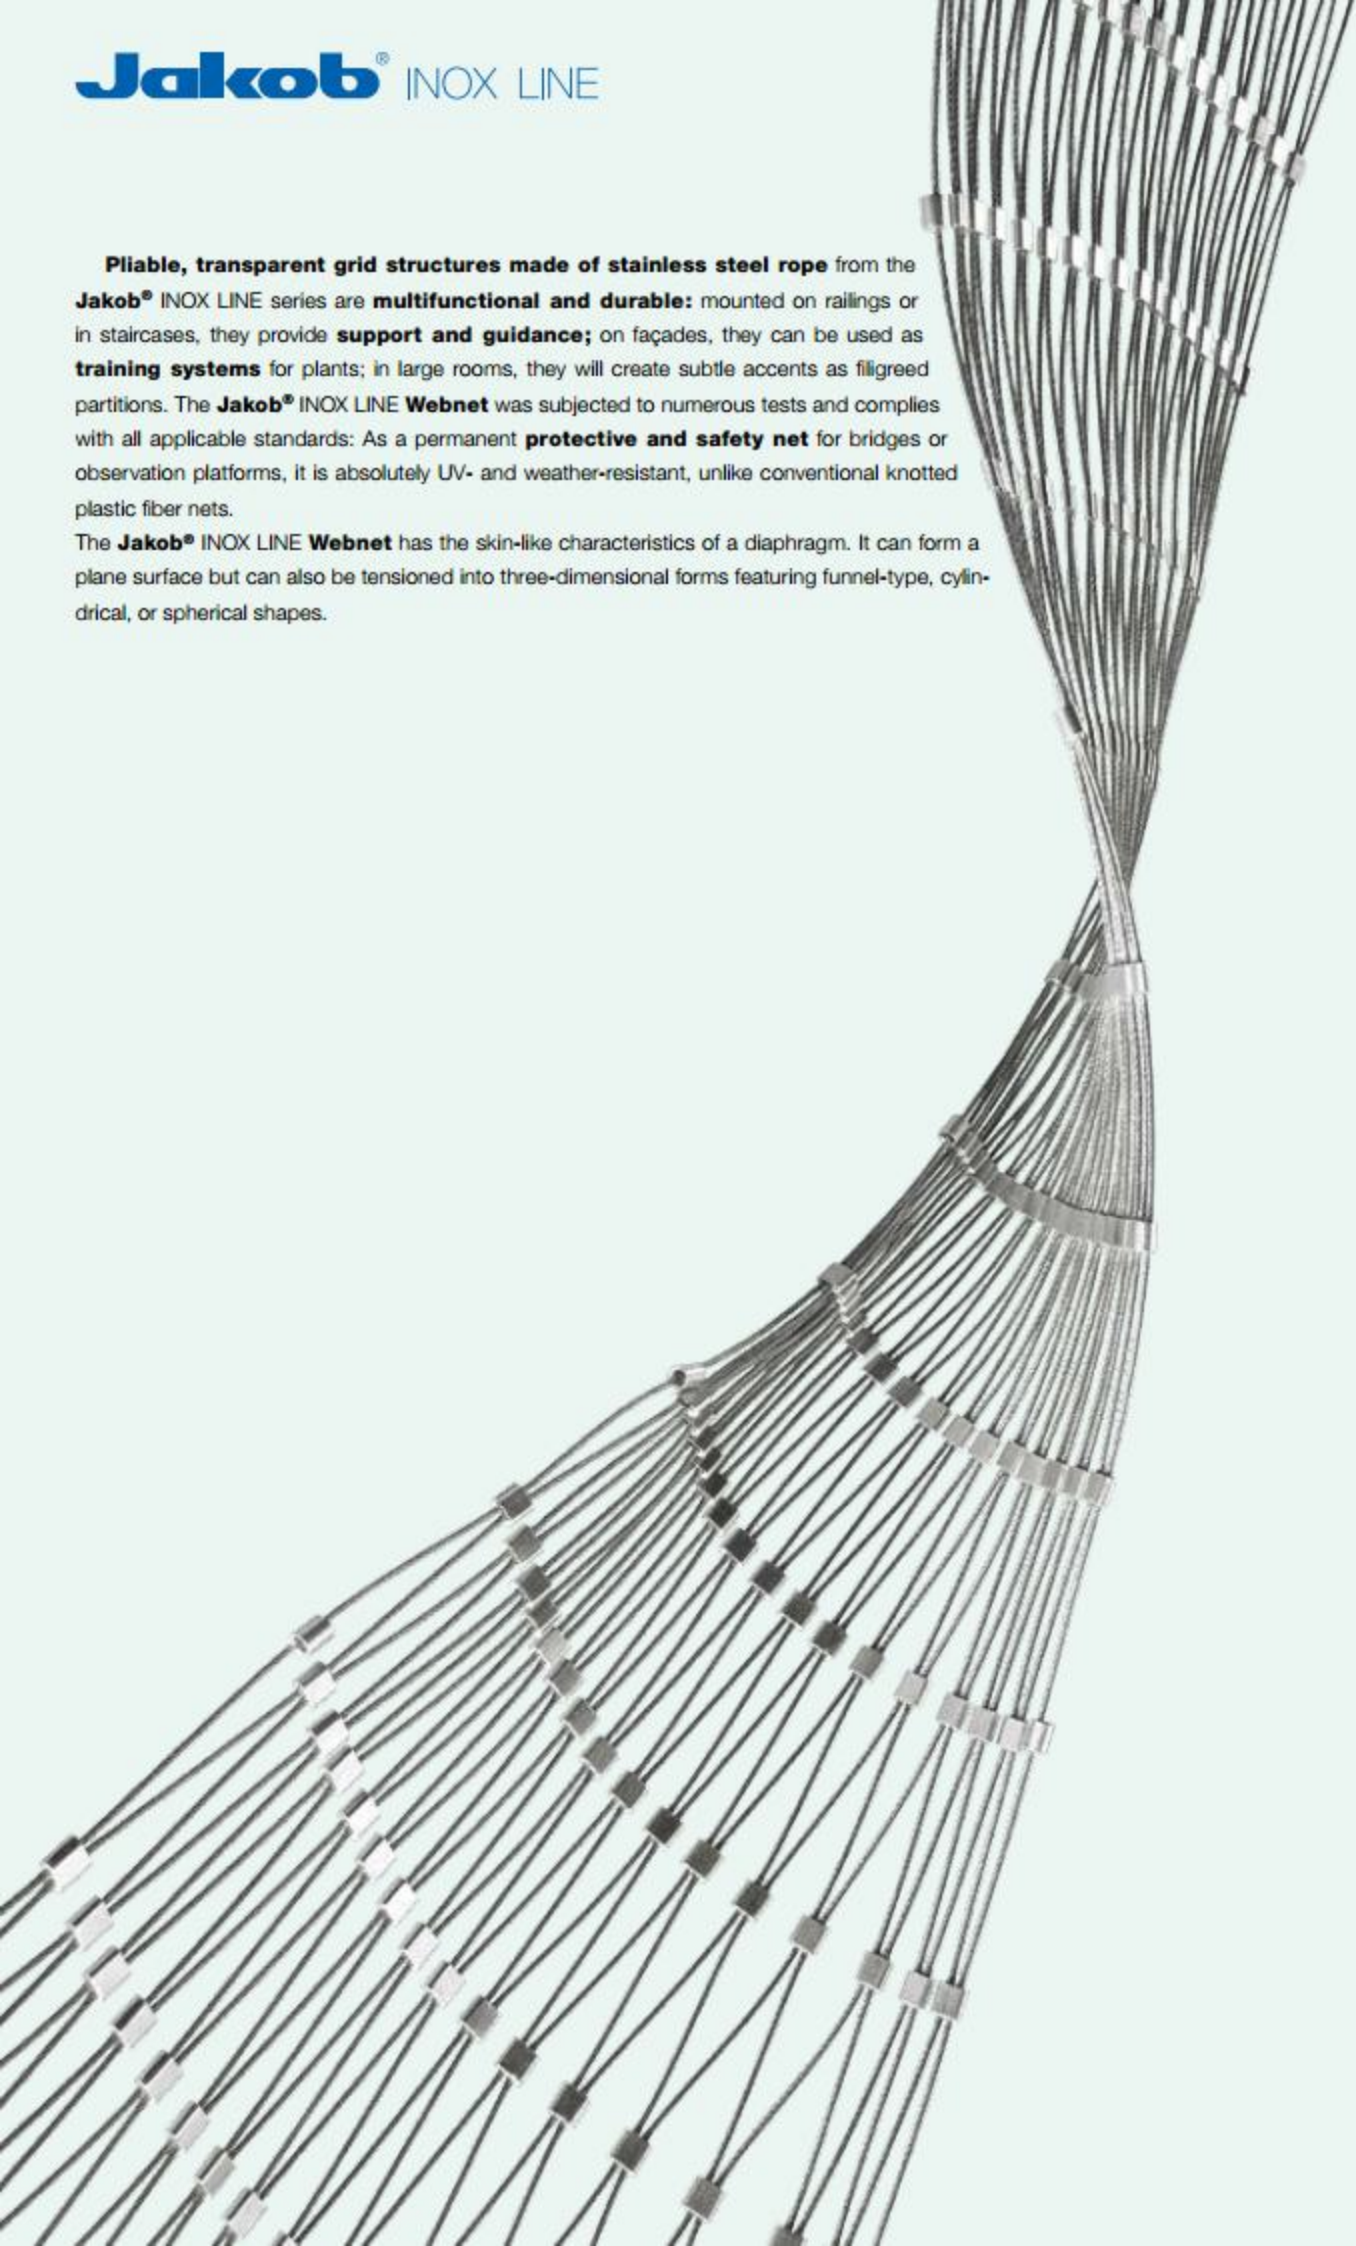




Webnet: Intelligent solutions in architecture and design

The Jakob® INOX LINE Webnet is a custom-manufactured, premium-quality product that is highly compatible with creative contemporary architecture. As part of our extensive, easy-to-assemble structural wire-rope series, it is ideal for flexible, intelligent solutions that address a vast variety of requirements: the multifunctional Jakob® INOX LINE Webnet technology combined with stainless steel rope, rods, or tubes with appropriate end connectors (Jakob® INOX LINE Basic 5.1 Green Solutions G1, and News X catalogues) not only discreetly fulfills its functions as a protective and supporting structure but also provides appeal as an elegant spatial design element.

Support and protection function

A lake region in western Switzerland with a safe bird's-eye view: in the **tethered balloon** on a platform **at the Lake of Neuenburg**, visitors can ascend to a height of 150 m. The large "captive balloon" was installed as a tourist attraction in the summer of 2002, when the Swiss National Exposition (Expo) took place. The combined **support and protection structure** made of rods, wire rope, and the **Jakob® INOX LINE Webnet** components created an impressive, futuristic takeoff and landing ramp with guaranteed safety factors.

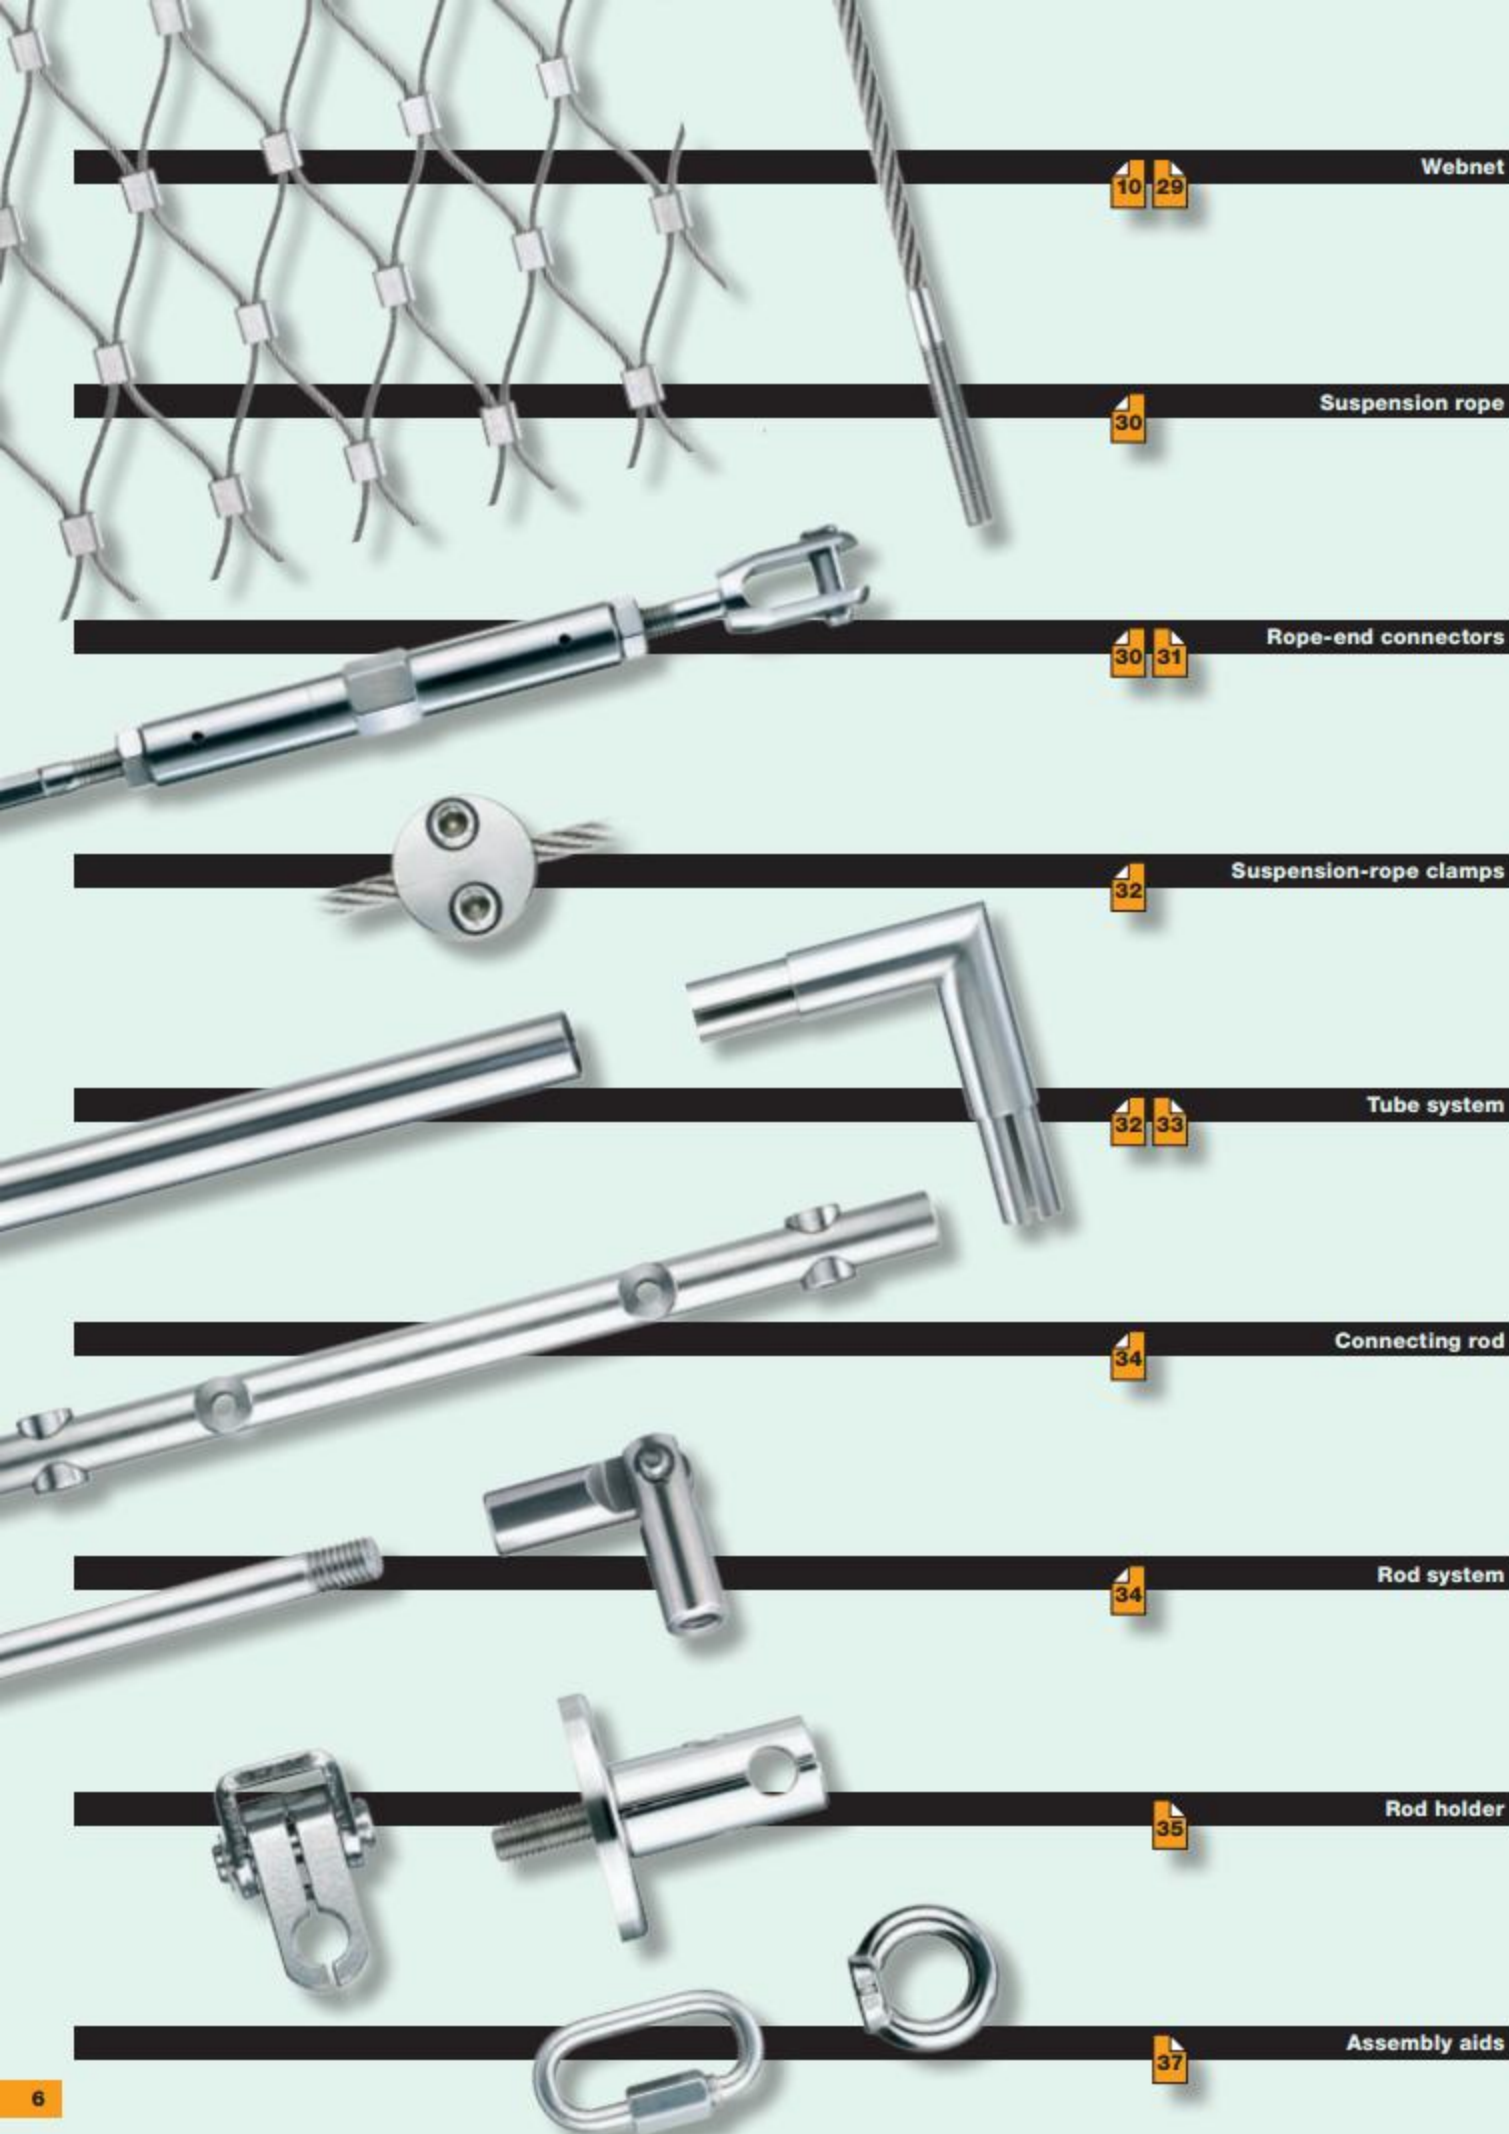

10 29

Webnet

30

Suspension rope

30 31

Rope-end connectors

32

Suspension-rope clamps

32 33

Tube system

34

Connecting rod

34

Rod system

35

Rod holder

37

Assembly aids

Webnet C rail

37



Webnet perimeter rope

38



Wire-rope cutters

38



Webnet sleeves

38



Webnet eye ends

39



Swaging tools

38

39



Threaded fasteners

40



Accessories

41



Crossnet

80

81





8.1



8.3

Huarte (E)

Spatial net structure

- Webnet rope \varnothing 2.0 mm, mesh aperture 200 mm
- Webnet size total: 3100 m²



8.2




Playground Argenteuil, Paris (F)

Ball catcher

- Webnet rope \varnothing 1.5 mm, mesh aperture 60 mm
- Webnet size total: 120 m²



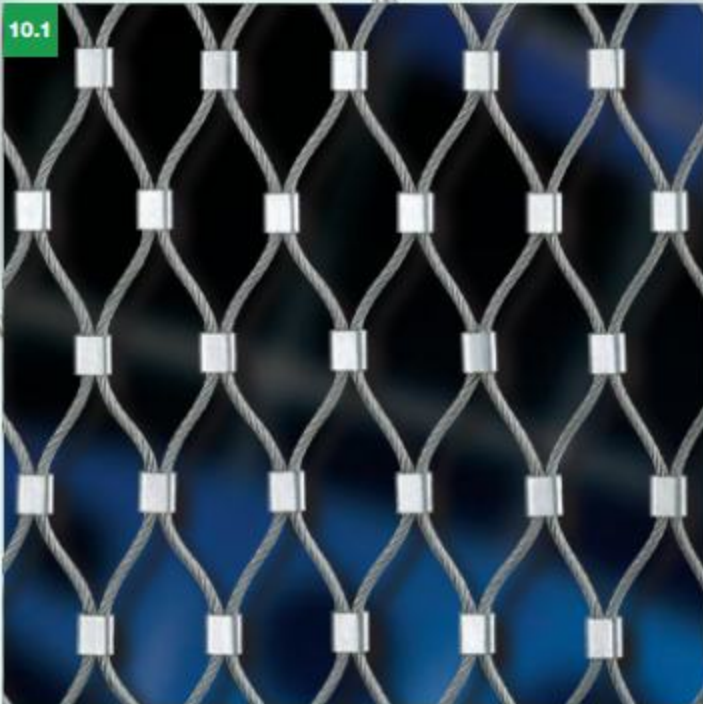

10.1

**Webnet with mesh aperture 40 mm
and wire-rope diameter 3.0 mm**



10.2

**Webnet with mesh aperture 40 mm
and wire-rope diameter 2.0 mm**

A fabric of particular resilience and flexibility, a “net” whose strands are neither knotted nor crossed: the **Jakob® INOX LINE Webnet** is a construction based on stainless steel wire ropes that lie parallel in pairs connected and reciprocally curved by offset sleeves.

The net construction can be pulled apart like an accordion, producing a spring force that varies depending on the mesh aperture and wire-rope thickness.


The **Jakob® INOX LINE Webnet** is a vibrant, premium-quality product: the **mesh aperture** (variable, from very tight to very wide) and the **wire-rope diameter** (1.0 mm, 1.5 mm, 2.0 mm, and 3.0 mm) determine its functionality and aesthetics. Most **Jakob® INOX LINE** components are made from the AISI 316 material group.




Webnet with mesh aperture 40 mm and wire rope-diameter 1.5 mm



Webnet with mesh aperture 40 mm and wire rope-diameter 1.0 mm

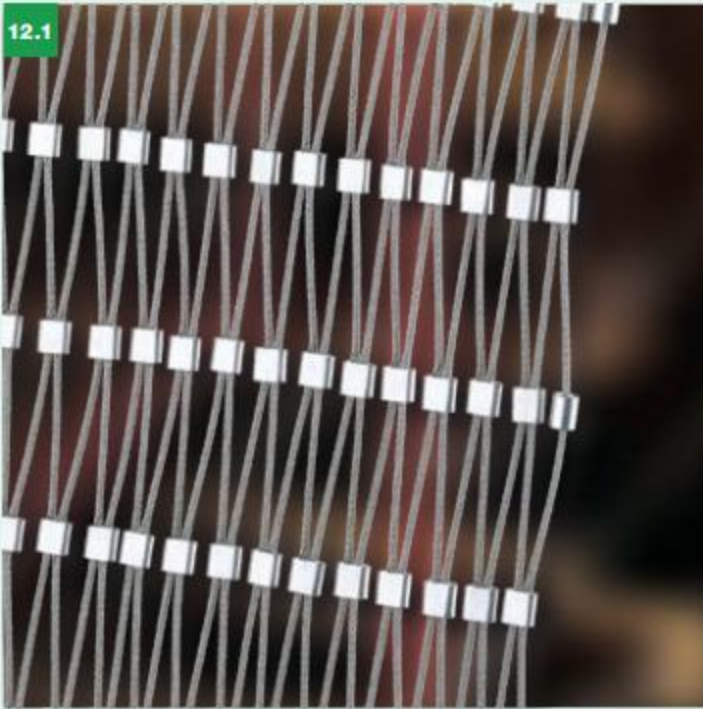

Webnet not tensioned (closed)

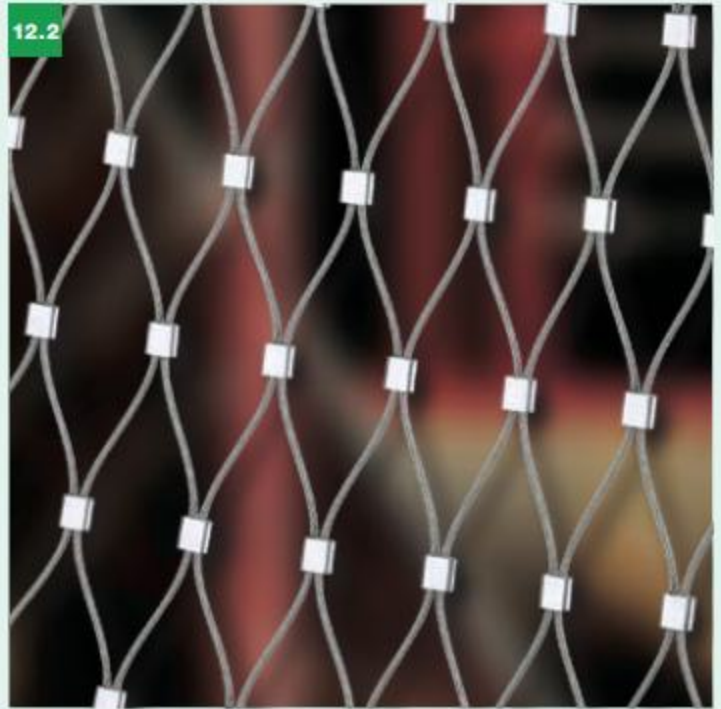

Webnet with 35° mesh angle



12.3

Webnet test frame for the determination of the force/elongation diagrams


The frame is used to determine the elongation of the **Webnet** in the height (**H**) and width (**W**) directions when exposed to different stretching forces. The insights form the basis of dimensioning and configuring the **Webnet** and the periphery structure.



12



Webnet with 50° mesh angle

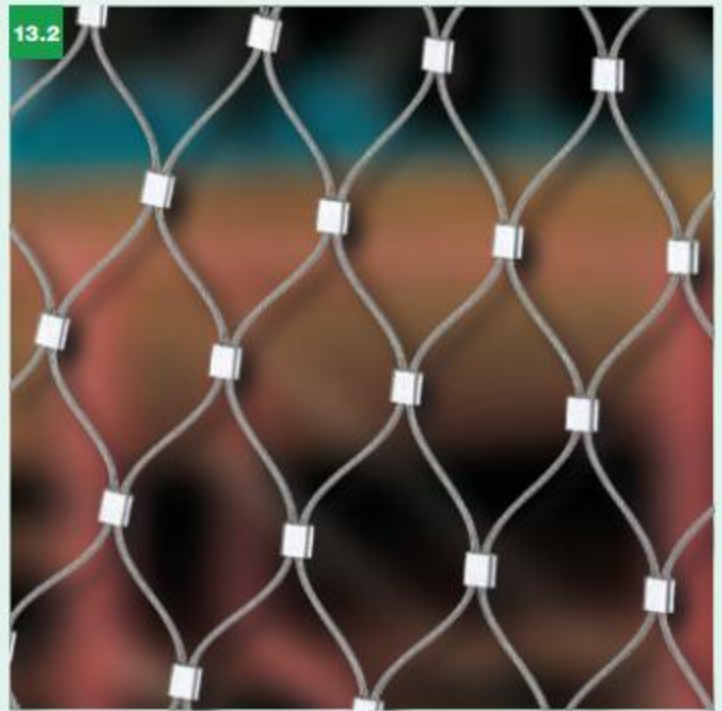

Webnet with 60° mesh angle (**Jakob®** standard)

The Jakob® INOX LINE Webnet was tested pursuant to EN 1263-1 for its static and dynamic load-bearing capacity.

Test data:

- **Webnet** size: length 7 m × width 5 m
- **Webnet** rope Ø 3.0 mm, mesh aperture 60 and 100 mm (horizontal and vertical meshes)
- **Webnet** rope Ø 2.0 mm, mesh aperture 60 and 100 mm (horizontal and vertical meshes)
- Suspension rope Ø 10.0 mm
- test object: 500-mm steel sphere, mass 100 kg
- drop height of test object: 7 m



Webnet with extended mesh angle: when stretched, the wire ropes load the sleeve (breaking limit).



14.1



14.2



14.3





14.4



The **Jakob® INOX LINE Webnet** has the skin-like characteristics of a diaphragm. It can form a plane surface but can also be tensioned into three-dimensional forms featuring funnel-type, cylindrical, or spherical shapes.

Jakob® INOX LINE, the original:

- custom-manufactured
- filigreed, discreet, elegant, flexible
- multifunctional, compatible with creative architecture
- premium quality, rugged, weather-resistant, non-corroding

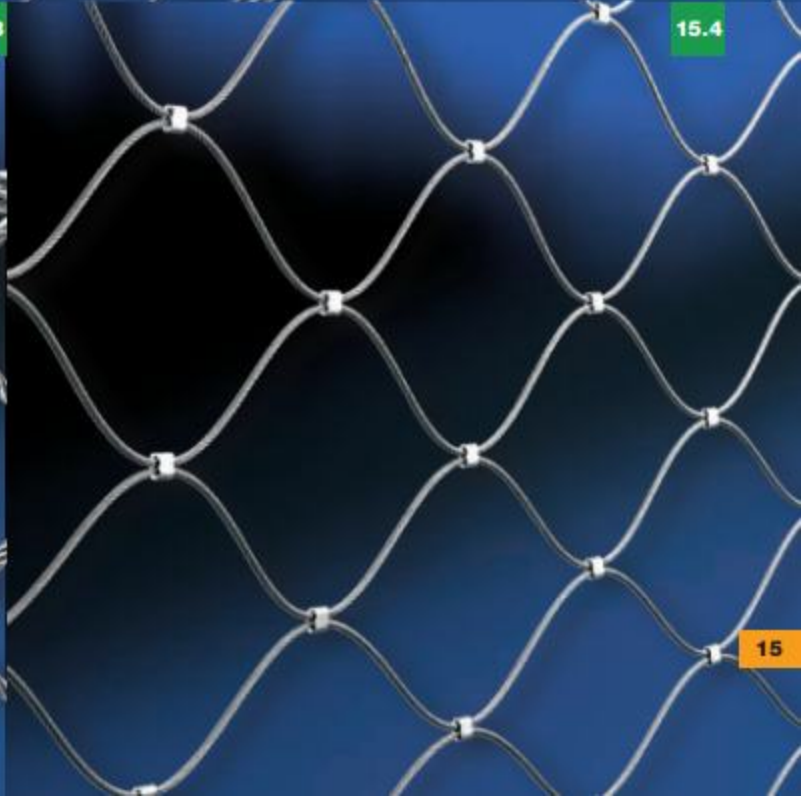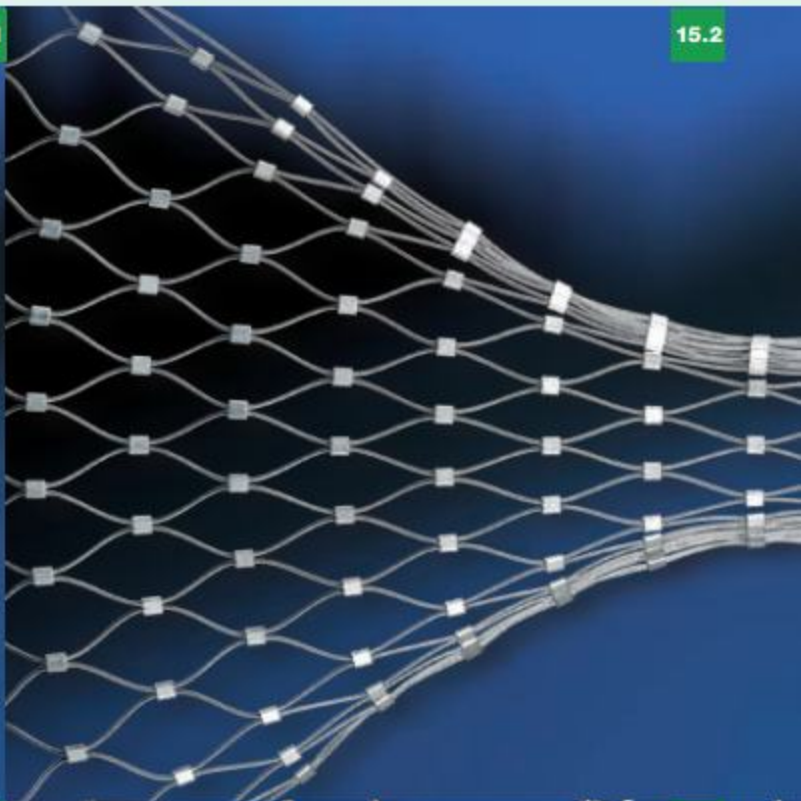



The multifunctional structural rope system composed of **Jakob® INOX LINE Webnet / Basic 5.1 / Green Solutions G1 / News X** components – stainless steel rope, rods, or tubes with appropriate end connectors – **opens new dimensions** and is fully designed for on-site assembly. However, we can also provide you with turnkey solutions including planning, engineering, installation blueprints, and assembly.

Jakob® INOX LINE, the original:

- custom-manufactured
- filigreed, discreet, elegant, flexible
- multifunctional, compatible with creative architecture
- premium quality, rugged, weather-resistant, non-corroding

Bern-Belpmoos airport (Switzerland)

- Spherical Webnet shroud
- Webnet rope \varnothing 2.0 mm, mesh aperture 100 mm



Unit conversion table

Length / Area / Mass

| | in. | ft. | yd. | sq.in. | sq.ft. | sq.yd. | lb. |
|--------------------|-------|-------|------|--------|--------|--------|-------|
| 1.0 m | 39.37 | 3.281 | 1.09 | | | | |
| 1.0 m ² | | | | 1550.0 | 10.764 | 1.196 | |
| 1.0 kg | | | | | | | 2.204 |

| | | | | | | | |
|-------|------------------|-------------------|------|-------------|-------------|-------------|-------|
| Meter | 1 inch = 25.4 mm | 1 foot = 304.8 mm | Yard | Square inch | Square foot | Square yard | Pound |
|-------|------------------|-------------------|------|-------------|-------------|-------------|-------|

Material groups

Table of major alloys

| Group | Country standard | | | Typical composition | | | | Type | Old designation | |
|--------------------|------------------|-------------------|-------|---------------------|------|----|------|------|-----------------|-----|
| | EN 10088-3 | AISI | AFNOR | C max. | Cr | Ni | Div. | | | |
| AISI 301-304 group | 1.4301 | X5CrNi18-10 | 304 | Z6CN18-09 | 0.07 | 18 | 9 | | Austenite | V2A |
| | 1.4305 | X8CrNiS18-9 | 303 | Z10CNF18-09 | 0.15 | 18 | 8 | S | Austenite | V2A |
| | 1.4310 | X10CrNi18-8 | 301 | Z12CN17-08 | 0.12 | 17 | 7 | | Austenite | V2A |
| AISI 316 group | 1.4401 | X5CrNiMo17-12-2 | 316 | Z6CND17-11 | 0.07 | 18 | 10 | | Austenite | V4A |
| | 1.4404 | X2CrNiMo17-12-2 | 316L | Z3CND17-11-02 | 0.03 | 17 | 11 | Mo | Austenite | V4A |
| | 1.4408 | GX5CrNiMo19-11-2 | | | 0.07 | 19 | 10 | | Austenite | V4A |
| | 1.4435 | X2CrNiMo18-14-3 | 316L | Z3CND18-14-03 | 0.03 | 18 | 12 | | Austenite | V4A |
| | 1.4436 | X3CrNiMo17-13-3 | 316 | Z6CND17-12 | 0.07 | 18 | 12 | | Austenite | V4A |
| | 1.4571 | X6CrNiMoTi17-12-2 | 316Ti | Z8CNDT17-12 | 0.10 | 18 | 10 | Ti | Austenite | V4A |

| | | | | | | | | |
|----------------------------------|-------------------|-------------|-----------------|--------|----------|--------|------------------------------------------------|-------------------------------------------------------------------------------------------|
| Designation of Webnet components | European standard | US standard | French standard | Carbon | Chromium | Nickel | S = Sulfur Ti = Titanium Mo = Molybdenum | V2A Easily machinable, corrosion-resistant V4A Acid-proof to high strength |
|----------------------------------|-------------------|-------------|-----------------|--------|----------|--------|------------------------------------------------|-------------------------------------------------------------------------------------------|



18.1

The characteristics of the ambient atmosphere determine the selection of the most suitable materials.

A distinction is made between rural, urban, industrial, and maritime climates.

The urban and industrial atmospheres typically contain aggressive substances in the form of carbon-containing particles and sulfur dioxide (SO₂).

Chloride ion-containing aerosols are found in maritime climates.

The rural atmosphere is comparatively benign.




Most Jakob® INOX LINE components are made from the AISI 316 material group.

Webnet order

Notes for convenient ordering

Ordering example:

- ❶ Free clearance: **H** mm x **L** mm
- ❷ **Webnet type: A - H18 - Ø 1,5 - W 60 x H 106**
Order No. 20255-0150-060 (tin-plated copper sleeves)
Order No. 20256-0150-060 (stainless steel sleeves)
 (see table on page 21)
- ❸ Webnet perimeter rope on page 38
Part No. 10820-0150

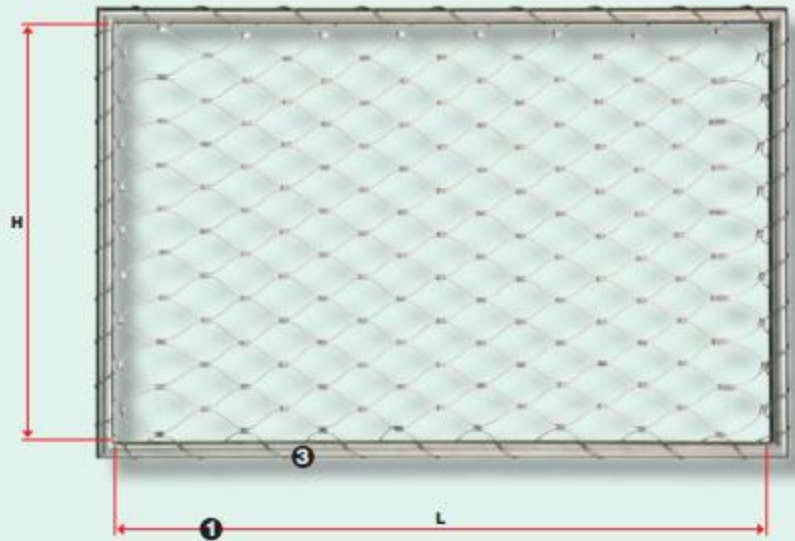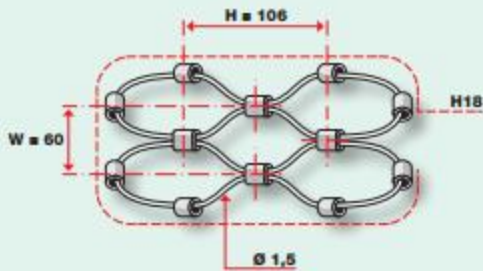

A The **Webnet** is available with wire rope and stranded wire. Types **A** or **B** are described on page 20.

H18 The **Webnet** is manufactured with vertical (**V**) or horizontal (**H**) meshes. Different perimeter design configurations are needed depending on the periphery structure (**V1-V30** on page 26 and **H1-H30** on page 28).

Ø 1,5 The **Webnet** is manufactured with four wire-rope and stranded-wire diameters (see tables on page 21). **Webnet** technical data: see tables on pages 22 to 23.

W x H The **Webnet** is manufactured with different mesh apertures (**W x H**) (see tables on page 21).



19.1

The Jakob® INOX LINE Webnet

is ideal for filigreed security structures:

- public safety measures
- protection against rockfall along hiking trails
- road barriers and protection in pedestrian zones
- safety net on bridges
- protection on panorama terraces or observation platforms
- protection against thrown objects
- protection in sports stadiums
- retention of floating debris in harbors, rivers, and lakes



19.2

Webnet types

**The Jakob® INOX LINE Webnet,
made of stainless steel
rope 6 × 7 + WC and 6 × 19 + WC,**

is a multifunctional product for all types of protective applications where aesthetic appearance is also a must.

**The Jakob® INOX LINE Webnet,
made of stainless steel
stranded wire 1 × 19,**

is suitable for applications involving high shear/scour forces and/or high tensile forces within the rope structure.



The **Jakob® INOX LINE Webnet A**, made of stainless steel rope 6 × 7 + WC and 6 × 19 + WC (AISI 316 material group).



Rope 6 × 7 + WC
for Webnet rope Ø
1.0 mm, 1.5 mm, and 2.0 mm




Rope 6 × 19 + WC
for Webnet rope Ø
3.0 mm




The **Jakob® INOX LINE Webnet B**, made of stainless steel stranded wire 1 × 19 (AISI 316 material group).



Stranded wire 1 × 19
for Webnet stranded wire Ø
1.0 mm, 1.5 mm, 2.0 mm, and 3.0 mm

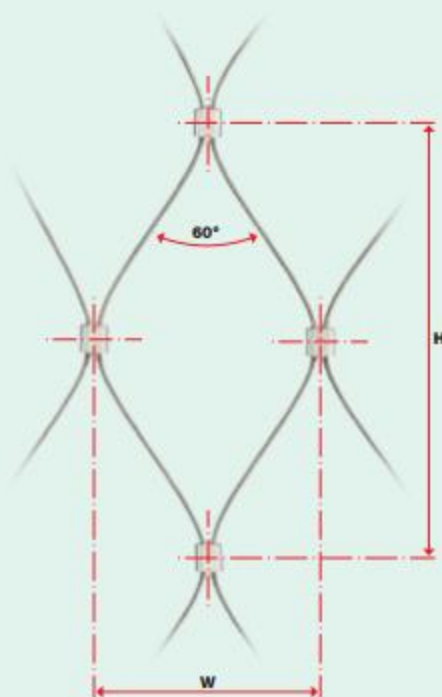

60° = standard mesh angle
W = mesh aperture
H = mesh aperture height

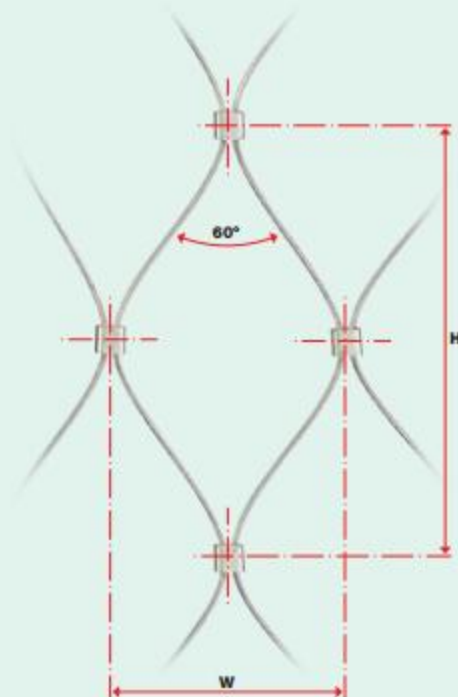

60° = standard mesh angle
W = mesh aperture
H = mesh aperture height



Sleeve material

The closed sleeve is threaded onto the wire ropes and swaged. The sleeve looks the same on both sides.

Order No. 20255-
Sleeve: DIN E-CU sn (tin-plated copper)
Order No. 20256-
Sleeve: AISI 316 material group



Sleeve material

The closed sleeve is threaded onto the stranded wire and swaged. The sleeve looks the same on both sides.

Order No. 20255-
Sleeve: DIN E-CU sn (tin-plated copper)
Order No. 20256-
Sleeve: AISI 316 material group



21.1



21.2



21.3



A



B

| Tin-plated copper sleeve: Nr. 20255- Sleeve AISI 316: Nr. 20256- | Rope \varnothing mm | Mesh aperture W x H mm |
|--------------------------------------------------------------------------------------------|--------------------------|---------------------------|
| 0100-020 | 1,0 | 20 x 38,2 |
| 0100-030 | 1,0 | 30 x 53 |
| 0100-040 | 1,0 | 40 x 70,5 |
| 0100-050 | 1,0 | 50 x 87,2 |
| 0100-060 | 1,0 | 60 x 105 |
| 0100-070 | 1,0 | 70 x 122 |
| 0100-080 | 1,0 | 80 x 139 |
| 0150-025 | 1,5 | 25 x 55,9 |
| 0150-030 | 1,5 | 30 x 61,6 |
| 0150-040 | 1,5 | 40 x 75 |
| 0150-050 | 1,5 | 50 x 90 |
| 0150-060 | 1,5 | 60 x 106 |
| 0150-070 | 1,5 | 70 x 124,2 |
| 0150-080 | 1,5 | 80 x 141 |
| 0150-100 | 1,5 | 100 x 175 |
| 0150-120 | 1,5 | 120 x 209 |
| 0150-140 | 1,5 | 140 x 244 |
| 0150-160 | 1,5 | 160 x 279 |
| 0150-180 | 1,5 | 180 x 313 |
| 0200-040 | 2,0 | 40 x 75,1 |
| 0200-050 | 2,0 | 50 x 90,5 |
| 0200-060 | 2,0 | 60 x 106 |
| 0200-070 | 2,0 | 70 x 124 |
| 0200-080 | 2,0 | 80 x 141 |
| 0200-100 | 2,0 | 100 x 175 |
| 0200-120 | 2,0 | 120 x 209 |
| 0200-140 | 2,0 | 140 x 244 |
| 0200-160 | 2,0 | 160 x 279 |
| 0200-180 | 2,0 | 180 x 313 |
| 0300-040 | 3,0 | 40 x 74,8 |
| 0300-050 | 3,0 | 50 x 90,5 |
| 0300-060 | 3,0 | 60 x 106 |
| 0300-070 | 3,0 | 70 x 124 |
| 0300-080 | 3,0 | 80 x 141 |
| 0300-100 | 3,0 | 100 x 175 |
| 0300-120 | 3,0 | 120 x 209 |
| 0300-140 | 3,0 | 140 x 244 |
| 0300-160 | 3,0 | 160 x 279 |
| 0300-180 | 3,0 | 180 x 313 |

| Tin-plated copper sleeve: Nr. 20255- Sleeve AISI 316: Nr. 20256- | Stranded wire \varnothing mm | Mesh aperture W x H mm |
|--------------------------------------------------------------------------------------------|-----------------------------------|---------------------------|
| 0100-041 | 1,0 | 40 x 70,5 |
| 0100-051 | 1,0 | 50 x 87,2 |
| 0100-061 | 1,0 | 60 x 105 |
| 0100-071 | 1,0 | 70 x 122 |
| 0100-081 | 1,0 | 80 x 139 |
| 0150-041 | 1,5 | 40 x 75 |
| 0150-051 | 1,5 | 50 x 90 |
| 0150-061 | 1,5 | 60 x 106 |
| 0150-071 | 1,5 | 70 x 124,2 |
| 0150-081 | 1,5 | 80 x 141 |
| 0150-101 | 1,5 | 100 x 175 |
| 0150-121 | 1,5 | 120 x 209 |
| 0150-141 | 1,5 | 140 x 244 |
| 0150-161 | 1,5 | 160 x 279 |
| 0150-181 | 1,5 | 180 x 313 |
| 0200-061 | 2,0 | 60 x 106 |
| 0200-071 | 2,0 | 70 x 124 |
| 0200-081 | 2,0 | 80 x 141 |
| 0200-101 | 2,0 | 100 x 175 |
| 0200-121 | 2,0 | 120 x 209 |
| 0200-141 | 2,0 | 140 x 244 |
| 0200-161 | 2,0 | 160 x 279 |
| 0200-181 | 2,0 | 180 x 313 |
| 0300-071 | 3,0 | 70 x 124 |
| 0300-081 | 3,0 | 80 x 141 |
| 0300-101 | 3,0 | 100 x 175 |
| 0300-121 | 3,0 | 120 x 209 |
| 0300-141 | 3,0 | 140 x 244 |
| 0300-161 | 3,0 | 160 x 279 |
| 0300-181 | 3,0 | 180 x 313 |

The **Jakob® INOX LINE Webnet** is a vibrant, premium-quality product made from the stainless AISI 316 material group: the **mesh aperture W x H** (variable, from very tight to very wide), the **wire-rope diameter** (1.0 mm, 1.5 mm, 2.0 mm, and 3.0 mm), and the choice of **wire rope or stranded wire** determine functionality and aesthetics. On request, we will supply **Webnet** products in any RAL or NCS colors.

Technical data Webnet A and B



| | A | | | | B | | | |
|----------------------------------|---------------------|-------------|--------------|---------------|---------------------|--------------|--------------|---------------|
| Ø mm | Rope Ø 1.0 | Rope Ø 1.5 | Rope Ø 2.0 | Rope Ø 3.0 | Strand Ø 1.0 | Strand Ø 1.5 | Strand Ø 2.0 | Strand Ø 3.0 |
| Construction | 6 × 7 + WC | 6 × 7 + WC | 6 × 7 + WC | 6 × 19 + WC | 1 × 19 | 1 × 19 | 1 × 19 | 1 × 19 |
| Minimum breaking load kN | 0,5 | 1,4 | 2,4 | 4,6 | 0,8 | 1,8 | 3,3 | 7,4 |
| Material group | AISI 316 | | | | AISI 316 | | | |
| Sleeves: | | | | | | | | |
| Swaged dimensions mm | 4 × 5 × 2 | 7 × 7,5 × 3 | 10 × 9 × 3,8 | 11 × 11 × 4,2 | 4 × 5 × 2 | 7 × 7,5 × 3 | 10 × 9 × 3,8 | 11 × 11 × 4,2 |
| Node strength L/kN | 0,1 | 0,1 | 0,3 | 0,2 | 0,1 | 0,1 | 0,3 | 0,2 |
| Node strength Q/kN | 1,0 | 2,0 | 2,6 | 4,0 | 1,0 | 2,0 | 2,6 | 4,0 |
| Material | E-CU sn or AISI 316 | | | | E-CU sn or AISI 316 | | | |
| W 20, 60° | | | | | | | | |
| Mesh aperture H mm | 20 | | | | | | | |
| Mesh aperture height H mm | 38,2 | | | | | | | |
| Weight kg/m ² | 1,12 | | | | | | | |
| Rope length m/m ² | 104 | | | | | | | |
| Number of sleeves/m ² | 2676 | | | | | | | |
| Light transmission % | 85,6 | | | | | | | |
| W 25, 60° | | | | | | | | |
| Mesh aperture H mm | 25 | 25 | | | | | | |
| Mesh aperture height H mm | 46 | 55,9 | | | | | | |
| Weight kg/m ² | 0,746 | 1,96 | | | | | | |
| Rope length m/m ² | 87 | 87 | | | | | | |
| Number of sleeves/m ² | 1800 | 1800 | | | | | | |
| Light transmission % | 88,82 | 82,93 | | | | | | |
| W 30, 60° | | | | | | | | |
| Mesh aperture H mm | 30 | 30 | | | | | | |
| Mesh aperture height H mm | 53 | 61,6 | | | | | | |
| Weight kg/m ² | 0,666 | 1,848 | | | | | | |
| Rope length m/m ² | 80 | 80 | | | | | | |
| Number of sleeves/m ² | 1300 | 1300 | | | | | | |
| Light transmission % | 90,73 | 88,84 | | | | | | |
| W 40, 60° | | | | | | | | |
| Mesh aperture H mm | 40 | 40 | 40 | 40 | 40 | 40 | | |
| Mesh aperture height H mm | 70,5 | 75 | 75,1 | 74,8 | 70,5 | 75 | | |
| Weight kg/m ² | 0,443 | 1,196 | 2,31 | 4,1 | 0,698 | 1,364 | | |
| Rope length m/m ² | 60 | 60 | 60 | 60 | 60 | 60 | | |
| Number of sleeves/m ² | 760 | 760 | 760 | 760 | 760 | 760 | | |
| Light transmission % | 93,29 | 89,55 | 84,94 | 79,58 | 93,29 | 89,55 | | |
| W 50, 60° | | | | | | | | |
| Mesh aperture H mm | 50 | 50 | 50 | 50 | 50 | 50 | | |
| Mesh aperture height H mm | 87,2 | 90 | 90,5 | 90,5 | 87,2 | 90 | | |
| Weight kg/m ² | 0,324 | 0,853 | 1,660 | 2,91 | 0,500 | 0,987 | | |
| Rope length m/m ² | 48 | 48 | 48 | 48 | 48 | 48 | | |
| Number of sleeves/m ² | 490 | 490 | 490 | 490 | 490 | 490 | | |
| Light transmission % | 94,72 | 91,76 | 88,4 | 84,09 | 94,72 | 91,76 | | |
| W 60, 60° | | | | | | | | |
| Mesh aperture H mm | 60 | 60 | 60 | 60 | 60 | 60 | 60 | |
| Mesh aperture height H mm | 105 | 106 | 106 | 106 | 105 | 106 | 106 | |
| Weight kg/m ² | 0,257 | 0,668 | 1,294 | 2,268 | 0,392 | 0,780 | 1,514 | |
| Rope length m/m ² | 40 | 40 | 40 | 40 | 40 | 40 | 40 | |
| Number of sleeves/m ² | 360 | 360 | 360 | 360 | 360 | 360 | 360 | |
| Light transmission % | 95,67 | 93,2 | 90,56 | 86,8 | 95,67 | 93,2 | 90,56 | |
| W 70, 60° | | | | | | | | |
| Mesh aperture H mm | 70 | 70 | 70 | 70 | 70 | 70 | 70 | 70 |
| Mesh aperture height H mm | 122 | 124,2 | 124 | 124 | 122 | 124,2 | 124 | 124 |
| Weight kg/m ² | 0,207 | 0,528 | 1,014 | 1,812 | 0,310 | 0,622 | 1,202 | 2,155 |
| Rope length m/m ² | 34 | 34 | 34 | 34 | 34 | 34 | 34 | 34 |
| Number of sleeves/m ² | 260 | 260 | 260 | 260 | 260 | 260 | 260 | 260 |
| Light transmission % | 96,32 | 94,29 | 92,03 | 88,86 | 96,32 | 94,29 | 92,03 | 88,86 |




| Ø mm | A | | | | B | | | |
|----------------------------------|------------|------------|------------|------------|--------------|--------------|--------------|--------------|
| | Rope Ø 1.0 | Rope Ø 1.5 | Rope Ø 2.0 | Rope Ø 3.0 | Strand Ø 1.0 | Strand Ø 1.5 | Strand Ø 2.0 | Strand Ø 3.0 |
| W 80, 60° | | | | | | | | |
| Mesh aperture H mm | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 |
| Mesh aperture height H mm | 139 | 141 | 141 | 141 | 139 | 141 | 141 | 141 |
| Weight kg/m ² | 0,173 | 0,435 | 0,831 | 1,513 | 0,256 | 0,519 | 0,997 | 1,815 |
| Rope length m/m ² | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| Number of sleeves/m ² | 195 | 195 | 195 | 195 | 195 | 195 | 195 | 195 |
| Light transmission % | 96,83 | 95,05 | 93,12 | 90,34 | 96,83 | 95,05 | 93,12 | 90,34 |
| W 100, 60° | | | | | | | | |
| Mesh aperture H mm | | 100 | 100 | 100 | | 100 | 100 | 100 |
| Mesh aperture height H mm | | 175 | 175 | 175 | | 175 | 175 | 175 |
| Weight kg/m ² | | 0,334 | 0,633 | 1,180 | | 0,404 | 0,771 | 1,431 |
| Rope length m/m ² | | 25 | 25 | 25 | | 25 | 25 | 25 |
| Number of sleeves/m ² | | 130 | 130 | 130 | | 130 | 130 | 130 |
| Light transmission % | | 96,09 | 94,61 | 92,36 | | 96,09 | 94,61 | 92,36 |
| W 120, 60° | | | | | | | | |
| Mesh aperture H mm | | 120 | 120 | 120 | | 120 | 120 | 120 |
| Mesh aperture height H mm | | 209 | 209 | 209 | | 209 | 209 | 209 |
| Weight kg/m ² | | 0,268 | 0,505 | 0,955 | | 0,327 | 0,621 | 1,167 |
| Rope length m/m ² | | 21 | 21 | 21 | | 21 | 21 | 21 |
| Number of sleeves/m ² | | 95 | 95 | 95 | | 95 | 95 | 95 |
| Light transmission % | | 96,77 | 95,56 | 93,68 | | 96,77 | 95,56 | 93,68 |
| W 140, 60° | | | | | | | | |
| Mesh aperture H mm | | 140 | 140 | 140 | | 140 | 140 | 140 |
| Mesh aperture height H mm | | 244 | 244 | 244 | | 244 | 244 | 244 |
| Weight kg/m ² | | 0,222 | 0,417 | 0,798 | | 0,272 | 0,517 | 0,980 |
| Rope length m/m ² | | 18 | 18 | 18 | | 18 | 18 | 18 |
| Number of sleeves/m ² | | 73 | 73 | 73 | | 73 | 73 | 73 |
| Light transmission % | | 97,26 | 96,24 | 95,29 | | 97,26 | 96,24 | 95,29 |
| W 160, 60° | | | | | | | | |
| Mesh aperture H mm | | 160 | 160 | 160 | | 160 | 160 | 160 |
| Mesh aperture height H mm | | 279 | 279 | 279 | | 279 | 279 | 279 |
| Weight kg/m ² | | 0,190 | 0,356 | 0,689 | | 0,235 | 0,445 | 0,850 |
| Rope length m/m ² | | 16 | 16 | 16 | | 16 | 16 | 16 |
| Number of sleeves/m ² | | 57 | 57 | 57 | | 57 | 57 | 57 |
| Light transmission % | | 97,62 | 96,74 | 95,32 | | 97,62 | 96,74 | 95,32 |
| W 180, 60° | | | | | | | | |
| Mesh aperture H mm | | 180 | 180 | 180 | | 180 | 180 | 180 |
| Mesh aperture height H mm | | 313 | 313 | 313 | | 313 | 313 | 313 |
| Weight kg/m ² | | 0,162 | 0,303 | 0,591 | | 0,202 | 0,380 | 0,732 |
| Rope length m/m ² | | 14 | 14 | 14 | | 14 | 14 | 14 |
| Number of sleeves/m ² | | 45 | 45 | 45 | | 45 | 45 | 45 |
| Light transmission % | | 97,89 | 97,12 | 95,83 | | 97,89 | 97,12 | 95,83 |



L
Longitudinal node strength



Q
Transversal node strength (breaking load of swage)



60°
Standard mesh angle
W
Mesh aperture
H
Mesh aperture height



A
Sleeve with wire rope



B
Sleeve with stranded wire

Webnet as a suspended ceiling in a gym and ancillary rooms of the sports facility. In the entrance area, the Webnet is used as a ball catcher and safety net. The nets are attached with non-corroding wire rope and rods with end connectors.



24.1



24.2



Gurmels gymnastics and sports hall (CH)

Safety and ball catcher nets


Suspended ceiling

- Webnet rope \varnothing 2.0 mm, mesh aperture 120 mm
- Webnet size total: 2600 m²

25.1



25.2

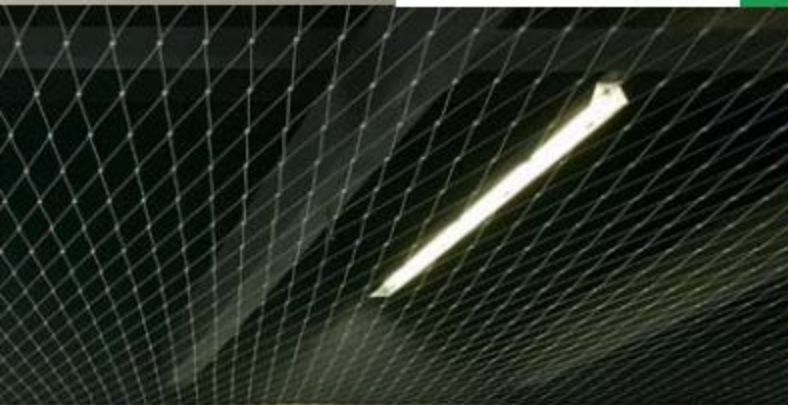

25.3



Possible perimeter types for Webnet, vertical mesh



V1



V2



V3



V4



V5



V6



V7



V8



V9



V10



V11



V12




V13



V14



V15



V16



V17



V18



V19



V20



V21



V22



V23



V24



V25



V26



V27



V28



V29



V30



Vertical mesh perimeter:
open at top with wire-rope end pairs



Vertical mesh perimeter:
closed with uncompressed sleeves at top



Webnet V: vertical mesh



27.4

Selection criteria for perimeter configuration V1 to V30

- Construction of periphery structure, such as suspension ropes (p. 30/31), tubular frame (p. 32/33), rod system (p. 34/35), or Webnet C rail (p. 37)
- Overall dimensions of Webnet
- Assembly-related reasons
- Magnitude of Webnet pretension forces

Some selection criteria for vertical (V) or horizontal (H) Webnet mesh orientation


- Architectural considerations
- Vertical meshes are less suitable for climbing (safety factor load)
- Assembly-related reasons (tight radii always require vertical meshes)
- When the Webnet is tensioned, the forces are greater in the mesh height direction than in the mesh width direction.

Vertical mesh perimeter:
with uncompressed sleeves at right




27.5

Vertical mesh perimeter:
closed with uncompressed sleeves at bottom

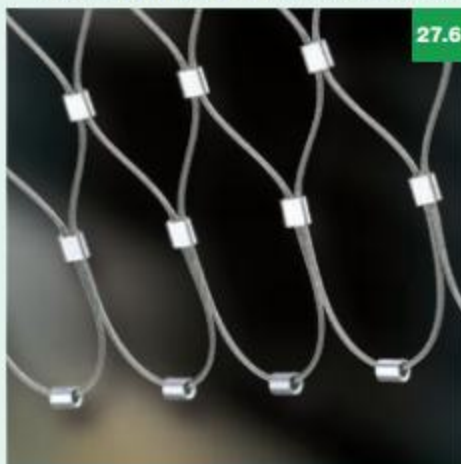

27.6

Vertical mesh perimeter:
closed with Webnet eye ends at bottom

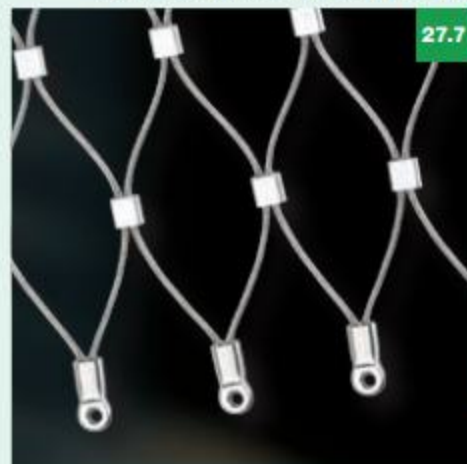

27.7

Possible Webnet perimeter types, horizontal mesh



H1




H2



H3



H4



H5



H6



H7



H8



H9



H10



H11



H12



H13



H14



H15



H16



H17



H18



H19



H20



H21



H22



H23



H24



H25



H26



H27



H28



H29



H30



29.1

Horizontal mesh perimeter:
closed with uncompressed sleeves at right



29.2

Horizontal mesh perimeter:
with uncompressed sleeves at bottom



29.3

Webnet H: horizontal mesh



29.4

Selection criteria for perimeter configuration H1 to H30

- Construction of periphery structure, such as suspension ropes (p. 30/31), tubular frame (p. 32/33), rod system (p. 34/35), or Webnet C rail (p. 37)
- Overall dimensions of Webnet
- Assembly-related reasons
- Magnitude of Webnet pretension forces

Some selection criteria for vertical (V) or horizontal (H) Webnet mesh orientation

- Architectural considerations
- Vertical meshes are less suitable for climbing (safety factor load)
- Assembly-related reasons (tight radii always require vertical meshes)
- When the Webnet is tensioned, the forces are greater in the mesh height direction than in the mesh width direction.

Horizontal mesh perimeter:
open at left with wire-rope end pairs



29.5

Horizontal mesh perimeter:
closed with uncompressed sleeves at left



29.6

Horizontal mesh perimeter:
closed with Webnet eye ends at left



29.7

Suspension rope

Construction 6 × 7 + WC

AISI 316 material group

| Part No. | Rope ø mm | Minimum breaking load kN | Weight kg/100 m |
|------------|--------------|-----------------------------|--------------------|
| 10820-0600 | 6.0 | 19.0 | 13.0 |
| 10820-0800 | 8.0 | 38.0 | 23.0 |



Wire-rope cutter

Type C12

| Part No. | Max. rope ø mm | Length mm |
|------------|-------------------|--------------|
| 30740-0800 | 8.0 | 500 |



VISSLINE® external thread end, right-hand

Only for rope No. 10820-

Breaking load: 90% of minimum wire-rope breaking load

AISI 316 material group

| Part No. | For rope ø mm | a mm | b1 mm | b2 mm | c mm | ø d mm |
|---------------|------------------|----------|----------|----------|---------|-----------|
| 30948-0600-30 | 6.0 | M8 × 30 | 15.0 | 45 | 30 | 7.2 |
| 30948-0600-60 | 6.0 | M8 × 60 | 15.0 | 75 | 60 | 7.2 |
| 30948-0800-30 | 8.0 | M10 × 30 | 15.0 | 45 | 30 | 9.0 |
| 30948-0800-60 | 8.0 | M10 × 60 | 15.0 | 75 | 60 | 9.0 |




Swaged external thread end, right-hand

Breaking load: 90% of minimum wire-rope breaking load

AISI 316 material group

| Part No. | For rope ø mm | Length of thread mm | b mm | c mm | ø d mm |
|----------------|------------------|------------------------|---------|---------|-----------|
| 30850-0600-030 | 6.0 | M10 × 30 | 85 | 30 | 10 |
| 30850-0600-060 | 6.0 | M10 × 60 | 115 | 60 | 10 |
| 30850-0600-080 | 6.0 | M10 × 80 | 135 | 80 | 10 |
| 30850-0800-080 | 8.0 | M12 × 80 | 160 | 80 | 13 |
| 30850-0800-120 | 8.0 | M12 × 120 | 200 | 120 | 13 |

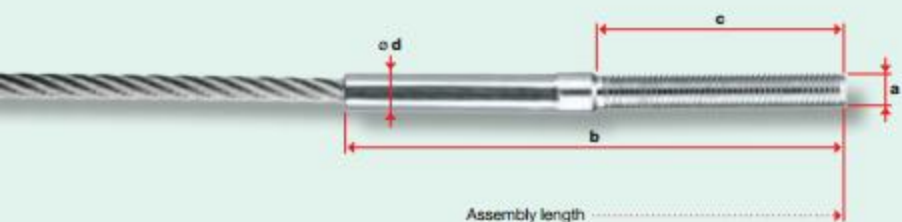

 Dimension **b** is **enlarged** by 3 to 6% during the swaging process.

Screwed external thread ends LT1, right-hand

For on-site assembly with rope No. 10820-


Breaking load: 90% of minimum wire-rope breaking load

AISI 316 material group

| Part No. | For rope ϕ mm | a x length of thread mm | ϕ d1 mm | ϕ d2 mm | sw mm | b1 mm | b2 mm | c mm |
|----------------|-----------------------|----------------------------|-----------------|-----------------|----------|----------|----------|---------|
| 30826-0600-030 | 6,0 | M8 x 30 | 14 | 17,1 | 15 | 92 | 62 | 30 |
| 30826-0600-060 | 6,0 | M8 x 60 | 14 | 17,1 | 15 | 122 | 62 | 60 |
| 30826-0600-031 | 6,0 | M10 x 30 | 14 | 17,1 | 15 | 92 | 62 | 30 |
| 30826-0600-061 | 6,0 | M10 x 60 | 14 | 17,1 | 15 | 122 | 62 | 60 |
| 30826-0600-081 | 6,0 | M10 x 80 | 14 | 17,1 | 15 | 142 | 62 | 80 |
| 30826-0800-061 | 8,0 | M10 x 60 | 22 | 25,4 | 22 | 140 | 83 | 60 |
| 30826-0800-081 | 8,0 | M10 x 80 | 22 | 25,4 | 22 | 160 | 83 | 80 |
| 30826-0800-080 | 8,0 | M12 x 80 | 22 | 25,4 | 22 | 160 | 83 | 80 |
| 30826-0800-120 | 8,0 | M12 x 120 | 22 | 25,4 | 22 | 200 | 83 | 120 |



Not suitable for **stranded wire No. 10810-**

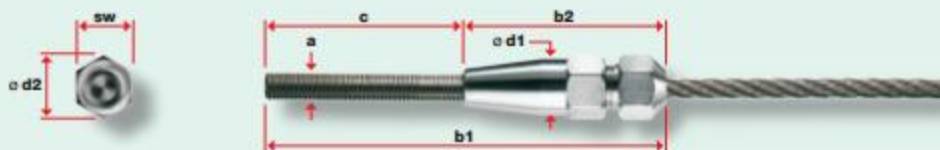

Correct assembly and the choice of the proper wire-rope diameter are the responsibility of the user.

Only **Jakob rope No. 10820-** assures full functionality.

Turnbuckle with MONOFORK, swaged

Breaking load: 90% of minimum wire-rope breaking load

AISI 316 material group

Turnbuckle body (b2): chrome-plated brass

| Part No. | Rope ϕ mm | a mm | b1 mm | b2 mm | ϕ d1 mm | e mm | f mm | g mm | h mm | ⊕ Range mm | ⊖ |
|---------------|-------------------|---------|----------|----------|-----------------|---------|---------|---------|---------|------------------|----|
| 30870-0600-01 | 6.0 | M10 | 319.5 | 140 | 9 | 10.5 | 25.5 | 12 | 21.5 | 60 | 50 |
| 30870-0800-01 | 8.0 | M12 | 377 | 160 | 12 | 18 | 32 | 16.3 | 30 | 59 | 49 |


⊕ ⊖ Tensioning range

information: The external thread ends are both screwed in halfway.

Caution: The minimal screw insertion depth is 1.5 x thread ϕ (M8 = 12 mm).

← ⊕ → = make longer (relax)

→ ⊖ ← = make shorter (tension)

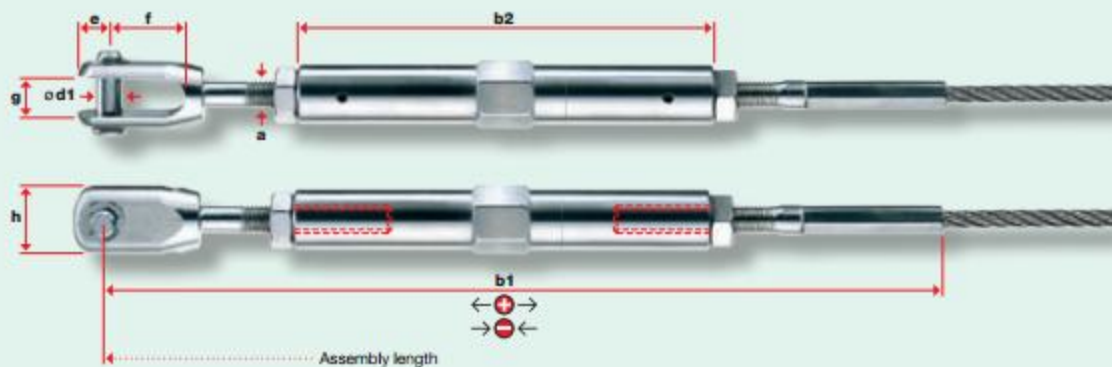

Turnbuckle with MONOFORK, screwed

For on-site assembly with rope No. 10820-

Breaking load: 90% of minimum wire-rope breaking load

AISI 316 material group

Turnbuckle body (b2): chrome-plated brass

| Part No. | Rope ϕ mm | a mm | b1 mm | b2 mm | ϕ d mm | e mm | f mm | g mm | h mm | ⊕ Range mm | ⊖ |
|---------------|-------------------|---------|----------|----------|----------------|---------|---------|---------|---------|------------------|----|
| 30822-0600-01 | 6.0 | M10 | 327.5 | 140 | 9 | 10.5 | 25.5 | 12 | 21.5 | 60 | 50 |
| 30822-0800-01 | 8.0 | M12 | 385 | 160 | 12 | 18 | 32 | 16.3 | 30 | 59 | 49 |


⊕ ⊖ Tensioning range

information: The external thread ends are both screwed in halfway.

Caution: The minimal screw insertion depth is 1.5 x thread ϕ (M8 = 12 mm).

← ⊕ → = make longer (relax)


→ ⊖ ← = make shorter (tension)

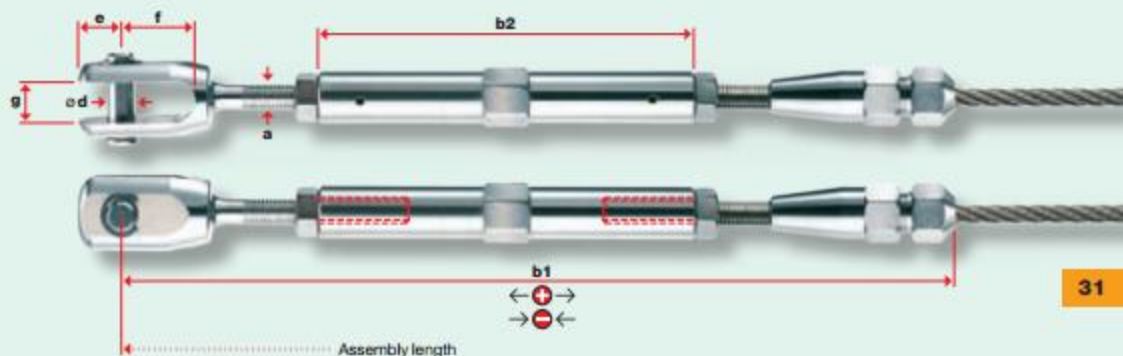

Suspension-rope clamp

AISI 316 material group


| Part No. | a | c | ø d for rope |
|---------------|-----|----|--------------|
| | mm | mm | mm |
| 30858-0600-10 | M8 | 15 | 6,0 |
| 30858-0600-25 | M8 | 25 | 6,0 |
| 30858-0800-10 | M8 | 15 | 8,0 |
| 30858-0800-25 | M8 | 25 | 8,0 |
| 30858-1012-10 | M12 | 20 | 10,0 – 12,0 |

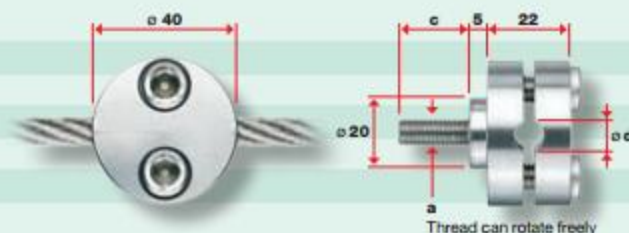

Adjustable suspension-rope clamp

AISI 316 material group

| Part No. | b | c | ø d for rope connection |
|---------------|------|----|-------------------------|
| | mm | mm | with external threads |
| 30858-0600-11 | 26,0 | 15 | M8 |
| 30858-0600-13 | 26,0 | 25 | M8 |
| 30858-0600-12 | 29,5 | 15 | M10 |
| 30858-0600-14 | 29,5 | 25 | M10 |

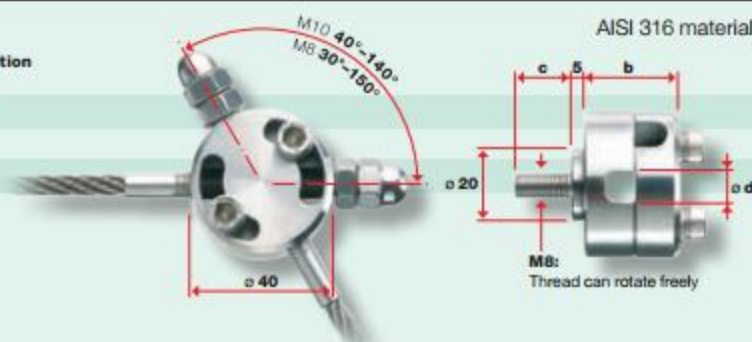

Webnet wire-rope clamp G1

For attachment to mounting structure without suspension rope

AISI 316 material group

| Part No. | Hole type | For Webnet rope ø |
|---------------|------------------------------------|-------------------|
| | | mm |
| 30920-0400-00 | Through hole for M8 | 1.5–3.0 |
| 30920-0400-05 | For M5 screw with countersunk head | 1.5–3.0 |




Tube, ground

Plug-in Webnet tubular frame for on-site assembly

AISI 316 material group

| Part No. | b1 | ø d1 | k | Weight |
|---------------|---------------|------|-----|--------|
| | mm | mm | mm | kg/m |
| 30924-0017-01 | max. 2500 | 17.2 | 1.6 | 0,6 |
| 30924-0026-01 | max. 2500 | 26.9 | 2.0 | 1,6 |
| 20800-0002 | Costs for cut | | | |

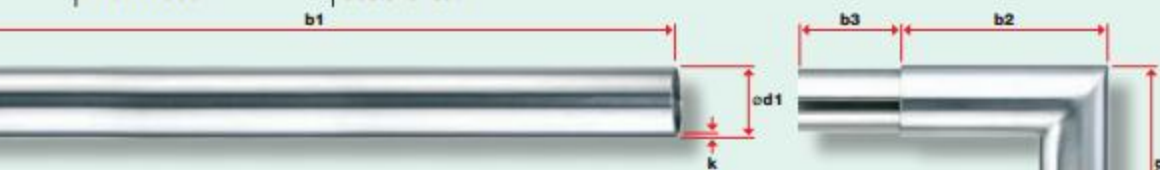

Tube elbow, ground

Plug-in Webnet tubular frame for on-site assembly

AISI 316 material group

| Part No. | ø d1 | ø d2 | k | b2 | b3 |
|---------------|------|------|-----|----|----|
| | mm | mm | mm | mm | mm |
| 30924-0017-10 | 17.2 | 12 | 1.6 | 60 | 30 |
| 30924-0026-10 | 26.9 | 21.7 | 2.0 | 60 | 30 |



Tube connector

Connects two tubes, removable

AISI 316 material group


| Part No. | For tube ø | b |
|---------------|------------|----|
| | mm | mm |
| 30924-0017-20 | 17.2 | 60 |
| 30924-0026-20 | 26.9 | 60 |



For the assembly of tubes or prefabricated tubular frames

AISI 316 material group

| Part No. | ø d for tube mm | b1 mm | b2 mm | b3 mm | c mm |
|---------------|-----------------|-------------------------|-------|-------|----------|
| 30924-0017-30 | 17,2 | 68 | 58 | 20 | Variable |
| 30924-0017-31 | 17,2 | 85 | 75 | 20 | Variable |
| 30924-0017-32 | 17,2 | 110 | 100 | 20 | Variable |
| 30924-0026-30 | 26,9 | 73 | 58 | 25 | Variable |
| 30924-0026-31 | 26,9 | 90 | 75 | 25 | Variable |
| 30924-0026-32 | 26,9 | 115 | 100 | 25 | Variable |
| 30924-0017-33 | 17,2 | A: Tube clamp, separate | | 20 | |
| 30924-0026-33 | 26,9 | A: Tube clamp, separate | | 25 | |

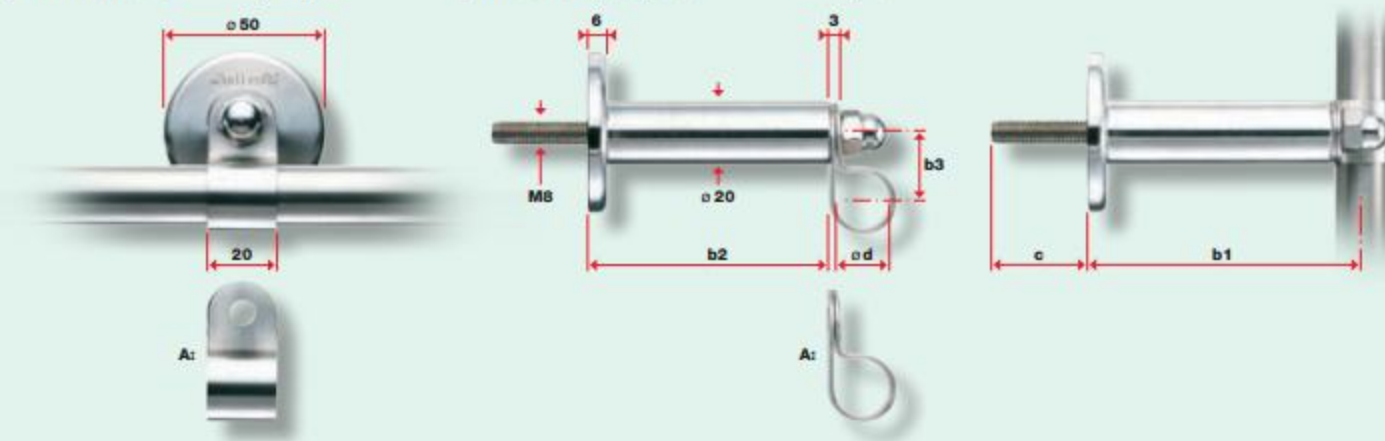

Welded Webnet tubular frame

Fully strung tubular frames according to your drawings

AISI 316 material group



| Part No. | For tube ø mm |
|---------------|---------------|
| 30924-0017-40 | 17,2 |
| 30924-0026-40 | 26,9 |

Welded Webnet tubular frame

Fully strung tubular frames according to your needs, with the matching assembly accessories for attachment to mounting structure.

What we need from you:

- dimensioned drawing of frame with tube Ø 17.2 or 26.9 mm
- **Webnet** order No. with rope Ø and mesh aperture **W**, Type **A** or **B**
- vertical mesh **V** or horizontal mesh **H**
- number of tube holders and spacers
- description of mounting surface
- see ordering example on **page 19**

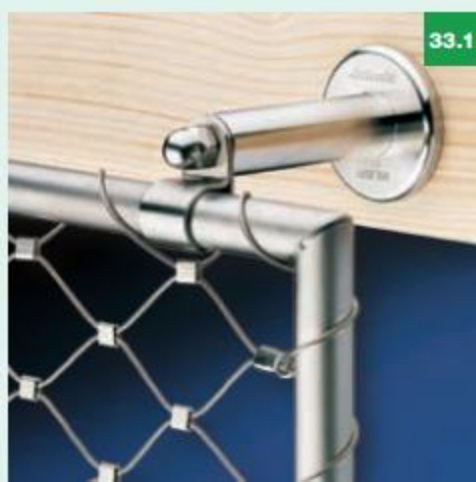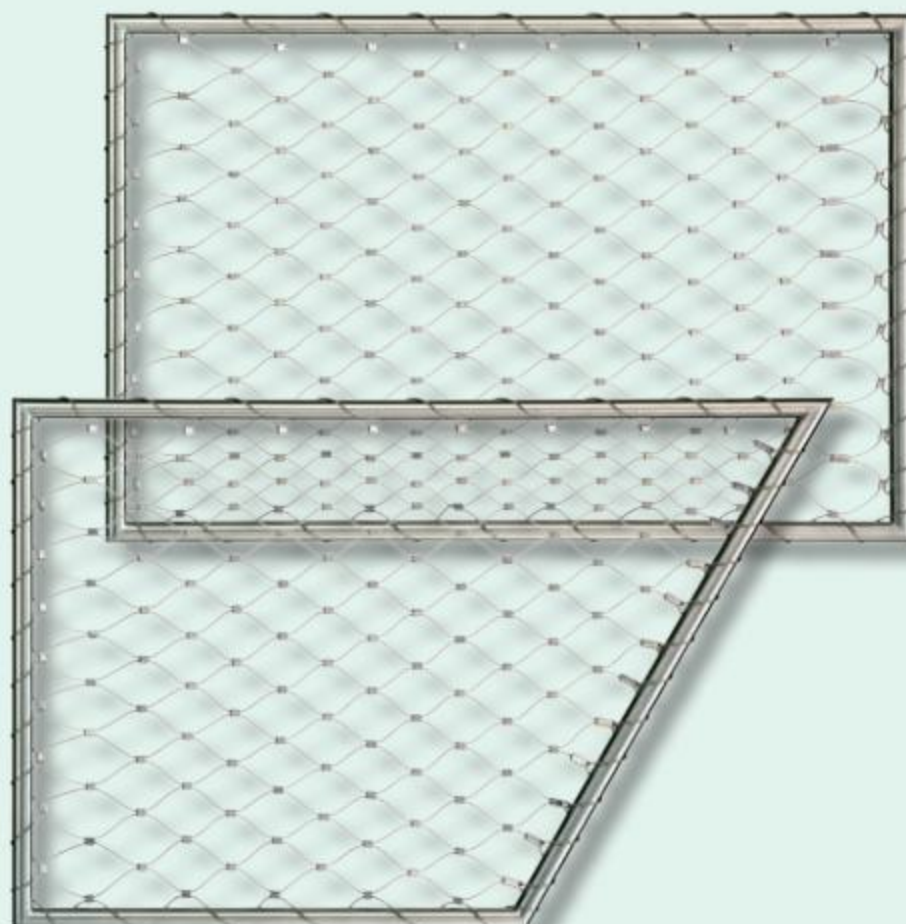


Connecting rod

Custom-made according to drilling template, see dimensions **b1**, **b2**, **b3**, **b4** and **b5**
 Round posts: indicate post diameter

AISI 316 material group

| Part No. | Ø d for rope connection with external threads | |
|---------------|-----------------------------------------------|------------------------------------|
| 30921-0800-20 | M8 | For flat posts |
| 30921-0800-21 | M8 | With post fittings for round posts |
| 30921-1000-20 | M10 | For flat posts |
| 30921-1000-21 | M10 | With post fittings for round posts |

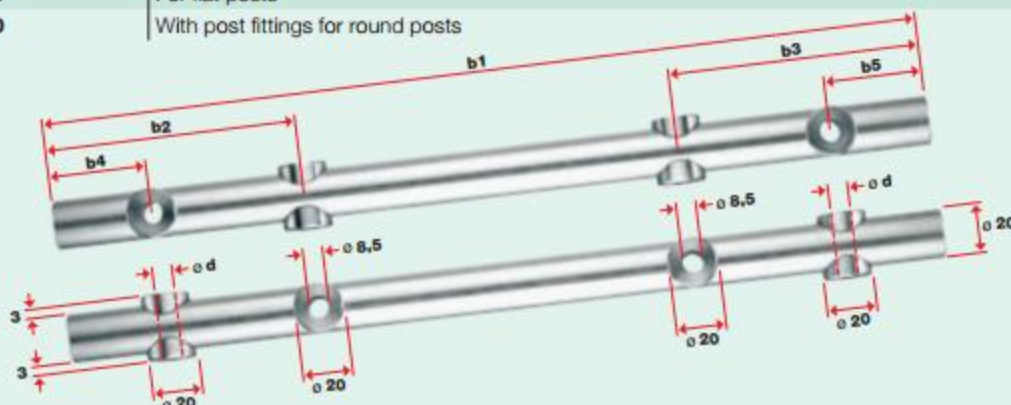


Spacer washers

To match connecting rod

AISI 316 material group

| Part No. | k mm |
|---------------|------|
| 30922-0800-02 | 4 |
| 30922-0800-01 | 6 |
| 30922-0800 | 12 |




Rod Ø 10 mm

With or without external thread end M10, right-hand

AISI 316 material group

| Part No. | b variable mm | Threaded mm |
|----------------|---------------|-----------------------|
| 30921-1000 | Max. 2500 | Not threaded |
| 32884-1000-011 | Max. 2500 | M10 × 15 at one end |
| 32884-1000-012 | Max. 2500 | M10 × 15 at both ends |
| 20800-0002 | Costs for cut | |

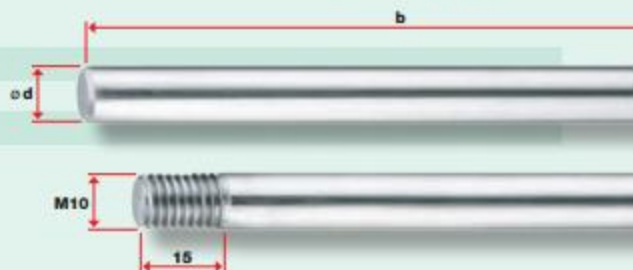

Rod connector with M10 internal threads

Connecting element for rod extensions

AISI 316 material group

| Part No. | Internal threads mm |
|---------------|---------------------|
| 32884-1000-03 | 2 × M10 × 19 |




Rod articulation with M10 internal threads

Variable-angle rod-connecting element

AISI 316 material group

| Part No. | Internal threads mm |
|----------------|---------------------|
| 32884-1000-032 | M10 × 15 |

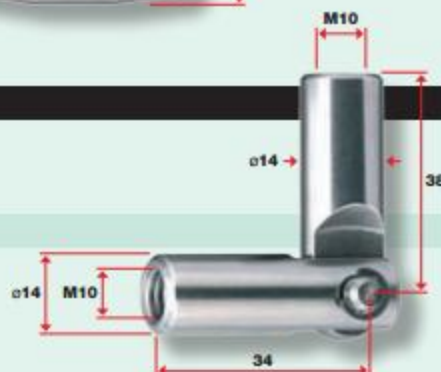


Rod holder

Matches rod \varnothing 10 mm

AISI 316 material group

Part No.

30921-1000-01

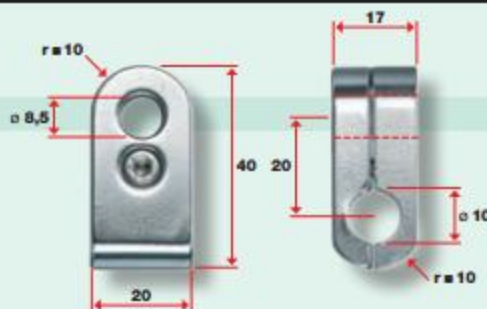


Rod holder with U-mount

Matches rod \varnothing 10 mm

AISI 316 material group

Part No.

30921-1000-10

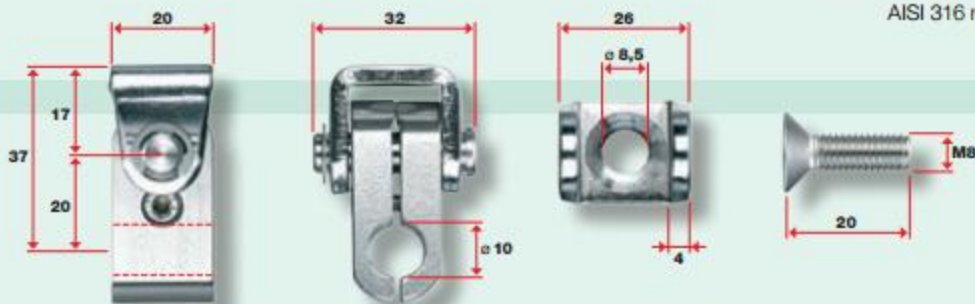

Rotating rod holder with counter washer

Matches rod \varnothing 10 mm

AISI 316 material group

Part No.


30921-1000-11

c
mm

14

30921-1000-13

29

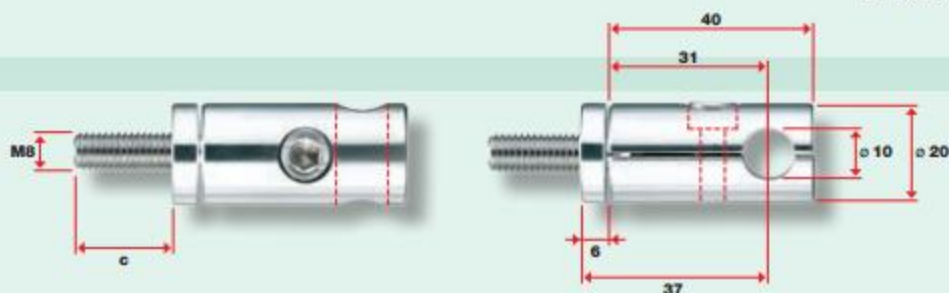

Rotating rod holder with support washer

Matches rod \varnothing 10 mm

AISI 316 material group

Part No.


30921-1000-12

c
mm

14

30921-1000-14

29

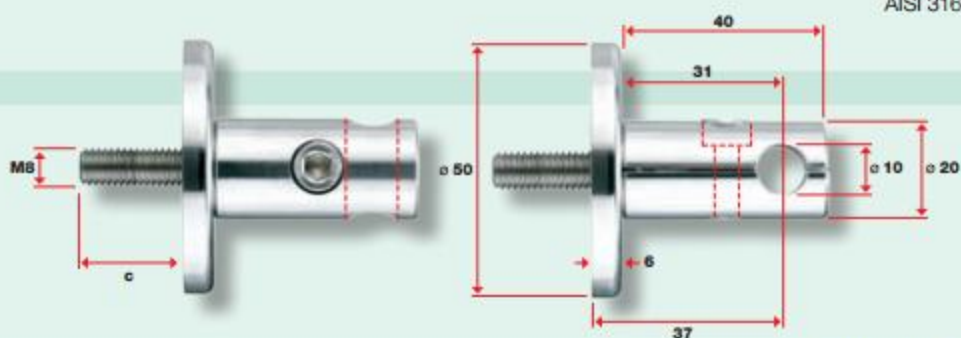


Rod holder, tensionable

Matches rod \varnothing 10 mm

AISI 316 material group

Part No.


30921-1000-15

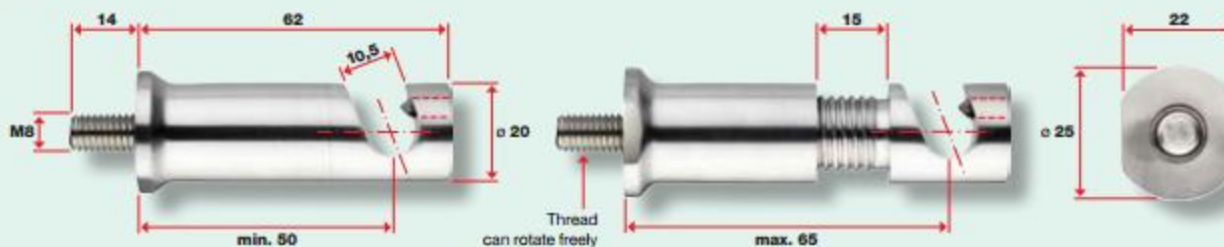

Spacer Ø 20/50

Matches rod holder No. **30921-1000-01**

| Part No. | b mm | c1 / c2 mm |
|------------|---------|---------------|
| 30919-0058 | 58 | Variable |
| 30919-0075 | 75 | Variable |
| 30919-0100 | 100 | Variable |

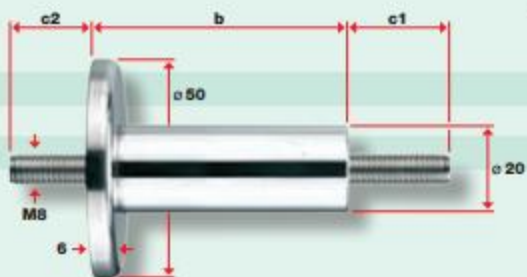


AISI 316 material group

Support washer with threaded rod

Support washer with internal thread M8

| Part No. | c1 / c2 mm |
|---------------|---------------|
| 30919-0050-01 | Variable |



AISI 316 material group

Lake of Geneva/Montreux (Switzerland)

Removable floating debris barrier

- Webnet rope Ø 3.0 mm, mesh aperture 50 mm
- Fully strung tubular frames



Eye nut

With internal thread M8, DIN 582

AISI 316 material group

Part No.

30838-0800



Load data not guaranteed


Quick coupling for suspension rope Ø 6 and 8 mm

AISI 316 material group

Part No.

30895-0700

Permissible load
kN
5

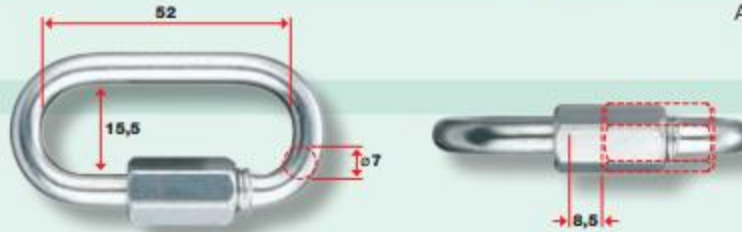

Compatible with Webnet rail

Webnet clip

AISI 316 material group

Part No.

30925-0001

For rope ϕ
mm
1.0 - 1.5

b
mm
15.5

h
mm
12

k
mm
8

30925-0002

2.0 - 3.0

15.5

12.5

8



Compatible with Webnet clip

Webnet C rail

AISI 301-304 material group

Part No.

30925-0010

b
mm
max. 2500

Typ

A Webnet C rail

30925-0011

max. 2500

B Countersunk hole, ϕ 5.5 mm (positions according to your specifications)

30925-0012

max. 2500

C Welded flange (positions according to your specifications)
Separate flange

30925-0013

max. 2500

D Welded stud (positions according to your specifications)
Separate stud

30925-0014



max. 2500

30925-0015

max. 2500

20800-0002

Costs for cut

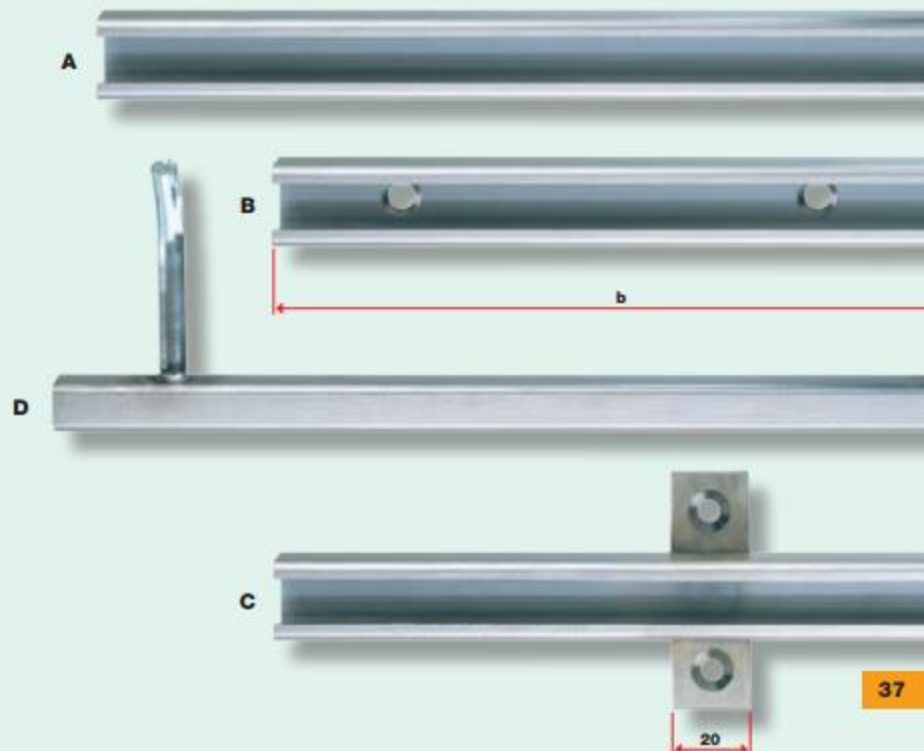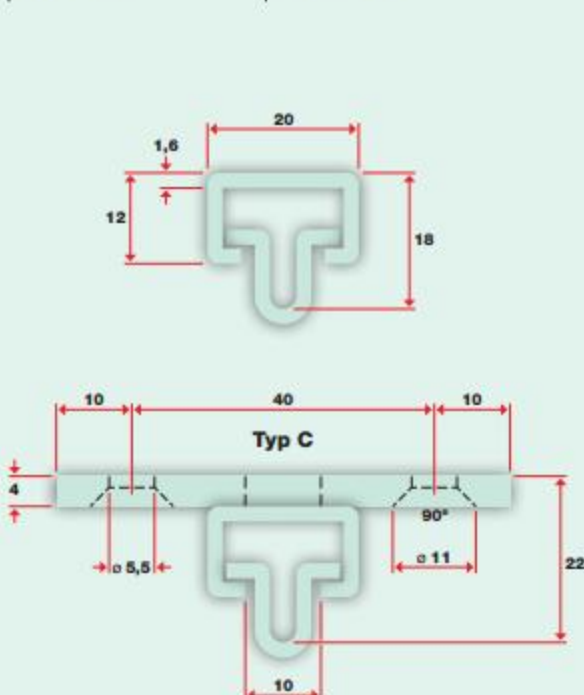

Webnet perimeter rope

Construction 6 × 7 + WC (* Ø 3 mm: 6 × 19 + WC)

AISI 316 material group

| Part No. | Rope ø mm | Minimum breaking load kN | Weight kg/100 m |
|---------------|--------------|-----------------------------|--------------------|
| 10820-0100-42 | 1.0 | 0.5 | 0.41 |
| 10820-0150 | 1.5 | 1.4 | 0.88 |
| 10820-0200 | 2.0 | 2.4 | 1.57 |
| 10830-0300 | 3.0 * | 5.8 | 3.60 |



Webnet perimeter strand

Construction 1 × 19

AISI 316 material group

| Part No. | Strand ø mm | Minimum breaking load kN | Weight kg/100 m |
|------------|----------------|-----------------------------|--------------------|
| 10810-0100 | 1.0 | 1.0 | 0.53 |
| 10810-0150 | 1.5 | 2.2 | 1.15 |
| 10810-0200 | 2.0 | 3.8 | 2.12 |
| 10810-0300 | 3.0 | 8.4 | 4.42 |



Wire-rope cutter

| Part No. | Max. rope ø mm | Length mm |
|---------------|-------------------|--------------|
| 30740-0500-01 | 5.0 | 190 |
| 30740-0800 | 8.0 | 500 |



Webnet sleeves

Matches Webnet perimeter rope and Webnet perimeter strand, available in two materials

Materials: E-CU Sn (tin-plated copper) and AISI 316

AISI 316 sleeves can only be swaged with **Webnet swaging tool type 2**

| Part No. Tin-plated copper | Part No. AISI 316 | For wire rope and stranded wire ø mm | b mm | ø d mm |
|-------------------------------|----------------------|-----------------------------------------|---------|-----------|
| 30582-0100 | 30584-0100 | 1.0 | 4 | 4 |
| 30582-0150 | 30584-0150 | 1.5 | 7.3 | 5.7 |
| 30582-0200 | 30584-0200 | 2.0 | 10 | 7 |
| 30582-0300 | 30584-0300 | 3.0 | 11 | 8.3 |
| 30582-0300-01 | 30584-0300-01 | 3.0 | 11 | 10.7 |



Webnet swaging tool type 1

For **on-site** swaging of Webnet sleeves made of tin-plated copper (see example on page 49)

| Part No. | Max. rope ø mm | Length mm |
|------------|-------------------|--------------|
| 30570-1500 | 1.5 | 250 |
| 30570-2000 | 2.0 – 3.0 | 300 |



On-site swaging and the choice of the correct rope or stranded-wire diameter with the matching Webnet sleeves and eye ends are the responsibility of the user.


Full functionality is guaranteed only with **Jakob wire ropes and stranded wire** and **original Webnet swaging tools**.

Webnet eye ends

Matches Webnet rope and Webnet strand

AISI 316 material group

| Part No. for one rope | Part No. for two ropes | For wire rope and stranded wire ϕ mm | b mm | ϕ d mm | h mm | k mm |
|--------------------------|---------------------------|----------------------------------------------|---------|----------------|---------|---------|
| 30880-0100-02 | 30880-0100-01 | 1.0 | 13 | 2 | 5 | 2.5 |
| 30880-0150-02 | 30880-0150-01 | 1.5 | 16 | 3 | 8.3 | 3 |
| 30880-0200-02 | 30880-0200-01 | 2.0 | 20 | 4.5 | 10 | 3 |
| 30880-0300-02 | 30880-0300-01 | 3.0 | 30 | 5 | 14 | 5 |

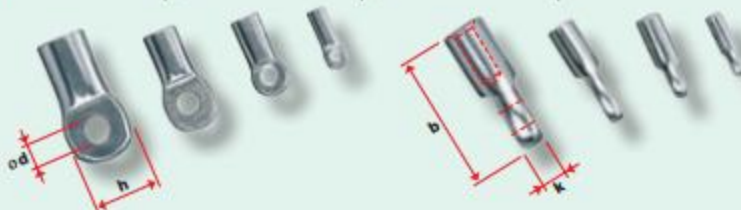

Webnet swaging tool type 2

For **on-site** swaging of AISI 316 Webnet sleeves and eye ends

| Part No. | Max. rope ϕ sleeves mm | Max. rope ϕ eye ends mm | Length mm |
|---------------|--------------------------------|---------------------------------|--------------|
| 30570-2001 | 1.0 – 3.0 | 1.0 – 2.0 | 400 |
| 30570-2001-01 | Tool inserts | | |




Battery-powered swaging tool

For **on-site** swaging of Webnet eye ends

Tools must be ordered separately

| Part No. | For rope ϕ mm | Type | Weight kg |
|--------------------------------|-----------------------|---------|--------------|
| 30570-2004 | 1,0 – 1,5 | EK 35/4 | 1,6 |
| 30570-2003 | 1,0 – 3,0 | EK 22 | 4,2 |
| Tool inserts for type EK 35/4: | | | |
| 30570-0004-10 | 1,0 | | |
| 30570-0004-15 | 1,5 | | |
| Tool inserts for type EK 22: | | | |
| 30570-0003-10 | 1,0 | | |
| 30570-0003-15 | 1,5 | | |
| 30570-0003-20 | 2,0 | | |
| 30570-0003-30 | 3,0 | | |

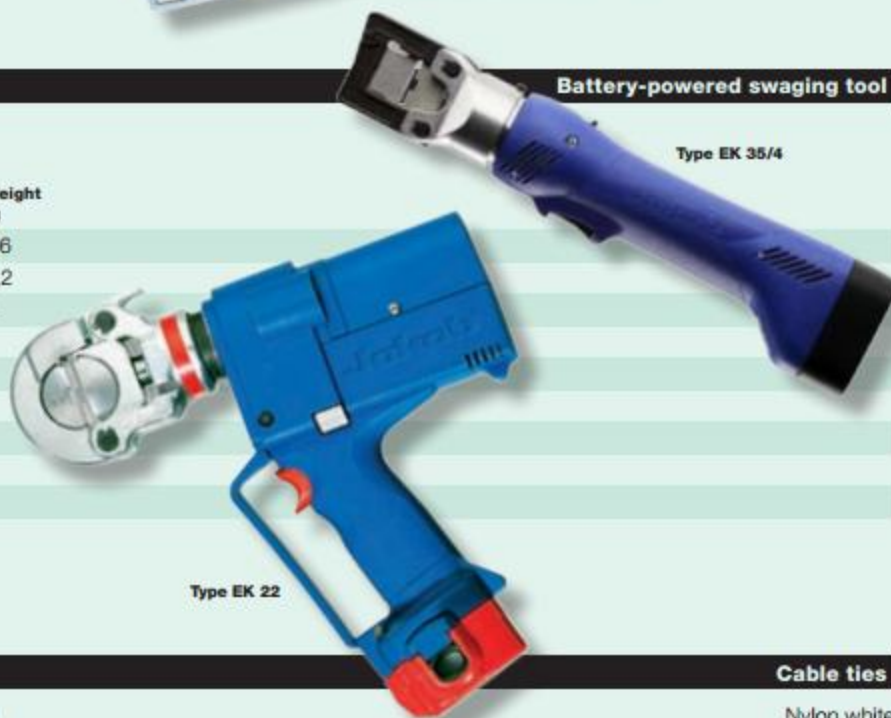

Type EK 35/4

Type EK 22

Cable ties

Webnet assembly accessories (see example on page 49)

Nylon white

| Part No. | Length mm |
|------------|--------------|
| 30916-0001 | 120 |
| 30916-0002 | 160 |
| 30916-0003 | 270 |
| 30916-0004 | 330 |




On-site swaging and the choice of the correct rope or stranded-wire diameter with the matching Webnet sleeves and eye ends are the responsibility of the user. Full functionality is guaranteed only with **Jakob wire ropes and stranded wire** and **original Webnet swaging tools**.

Hexagon head cap screw M8

DIN 933 AISI 316 material group


| Part No. | c mm |
|----------------|---------|
| 30843-0800-016 | M8 x 16 |
| 30843-0800-025 | M8 x 25 |
| 30843-0800 | M8 x 40 |

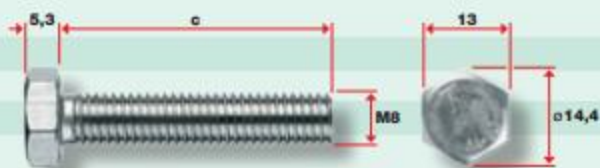

Socket head screw M8

DIN 912 AISI 316 material group


| Part No. | c mm |
|----------------|---------|
| 30844-0800-016 | M8 x 16 |
| 30844-0800-025 | M8 x 25 |
| 30844-0800 | M8 x 35 |

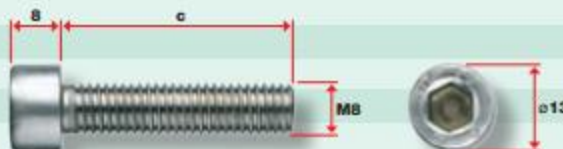

M8 threaded rod

AISI 316 material group


| Part No. | c mm |
|------------|---------------|
| 30882-0800 | M8 x variable |



Dual thread screw M8

With Phillips head AISI 316 material group


| Part No. | Length mm |
|------------|--------------|
| 30990-0010 | 50 |
| 30878-0800 | 100 |

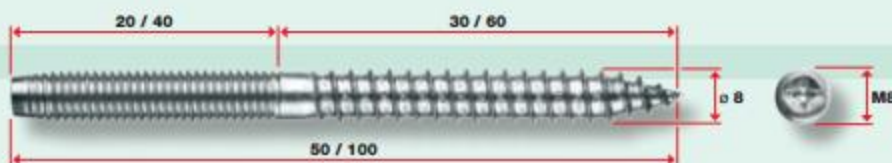

M8 nuts

AISI 316 material group


| Part No. | Type |
|---------------|---------------------|
| 30892-0800-02 | DIN 985 lock nut |
| 30892-0800 | DIN 934 hexagon nut |
| 30894-0800 | DIN 1587 dome nut |

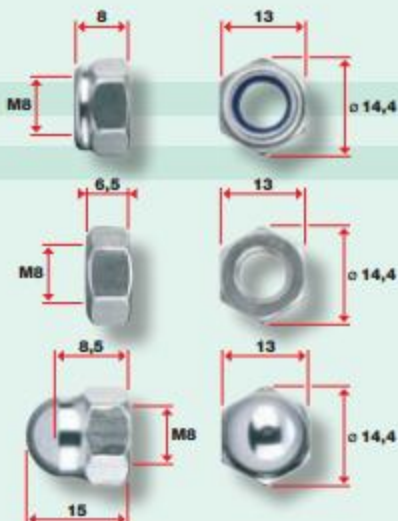

M8 washers

AISI 316 material group

| Part No. | Type |
|---------------|------------------------------|
| 30896-0800 | ø d 15 mm, DIN 433 |
| 30896-0800-24 | ø d 24 mm, DIN 9021 for wood |

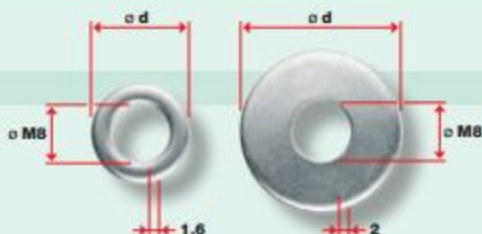

Wall anchor with internal thread RH M8

Suitable exclusively for concrete

Galvanized steel

| Part No. | Internal threads |
|---------------|------------------|
| 30803-0800-02 | M8 |



FIS VS 150 C injection mortar with perforated sleeve HK

For hollow and solid walls

| Part No. | Product |
|----------------|--------------------------------------------------------------------------------|
| 30803-0800-05 | 1 cartridge 145 ml with plunger disc, 2 mixer nozzles, 6 perforated sleeves HK |
| 30803-0800-052 | Mixer nozzle, separate |
| 30803-0800-053 | HK perforated sleeve, separate |
| 30803-0800-051 | Dispenser gun |

FIS VS 150 C injection mortar is a 2-component resin mortar. The perforated sleeve is needed only for hollow masonry. The threaded rod can be glued directly into the hole of a concrete wall.



Rampa screw-in nut for wood RH M8

With hex socket, type SK, -DIN 7965

Galvanized steel

| Part No. | Internal threads |
|---------------|------------------|
| 30803-0800-04 | M8 |




Thread lock fluid VC3

Protects screws and nuts against spontaneous loosening

| Part No. |
|------------|
| 30879-0001 |

The thread flanks must be filled at least $\frac{2}{3}$ of the way.



Thread lock fluid VC3 is a lacquer-like coating that contains two separate, microencapsulated components.

The safety function is activated when the fluid is compressed as the threaded fastener is closed. The fastener is then protected against vibration; screws and nuts can no longer work themselves loose.





Office building in Logrono (E)

- Webnet rope \varnothing 1.5 mm, mesh aperture 100 mm
- Webnet size total: 2200 m²





Enclosure at the Dublin Zoo (Ireland)

Webnet size 420 m²

- Periphery structure: stranded wire Ø 10.0 mm
- Webnet rope Ø 1.5 mm
- Webnet mesh aperture 40 mm





44.2



44.1 44.3



44.4






44.5



KNIE'S children's zoo, Rapperswil (Switzerland)

Jungle zone, Webnet size 700 m²

- Periphery structure, stranded wire Ø 22.0 mm
- Webnet rope Ø 1.5 mm
- Webnet mesh aperture 40 mm

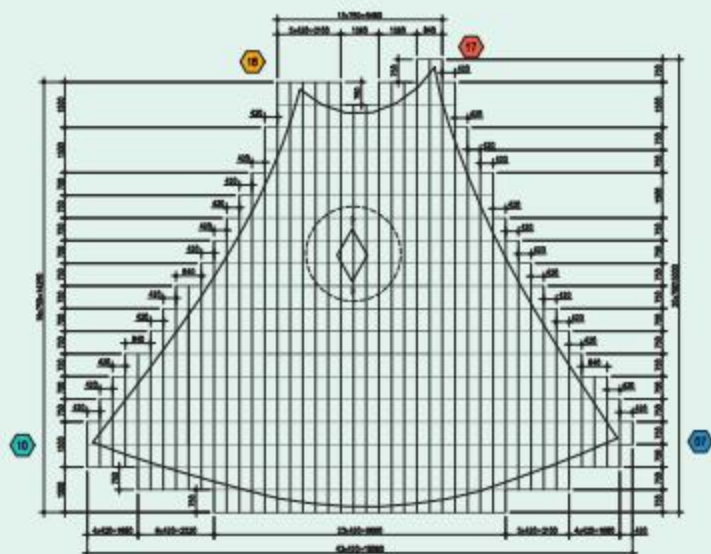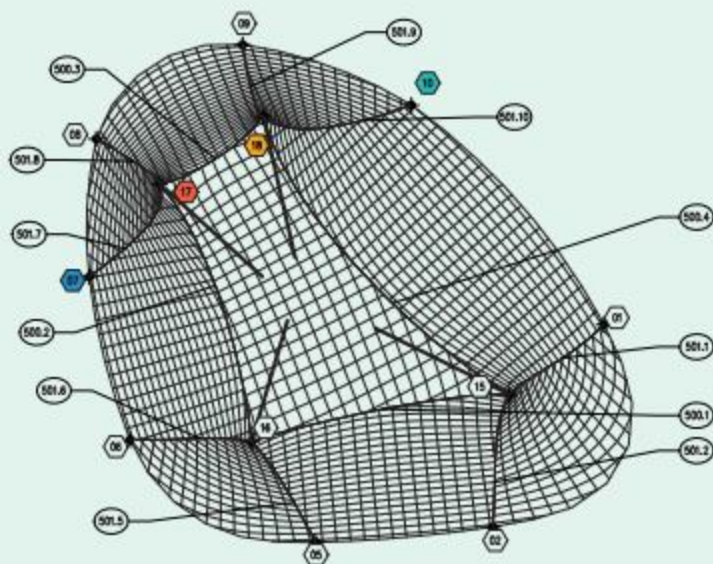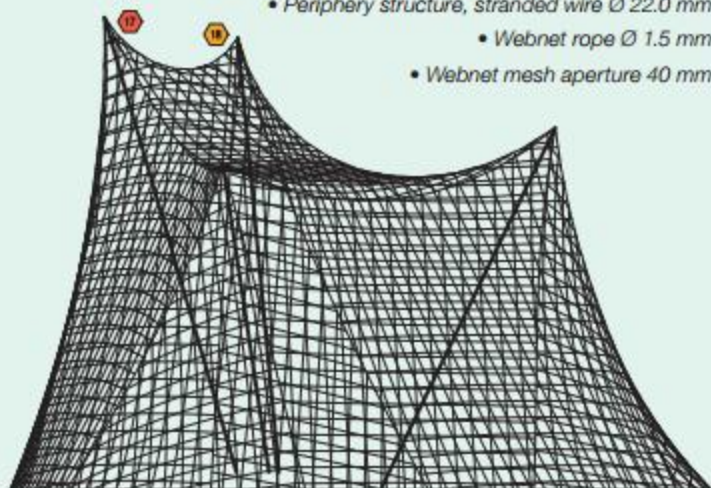


45.1



45.2




45.3

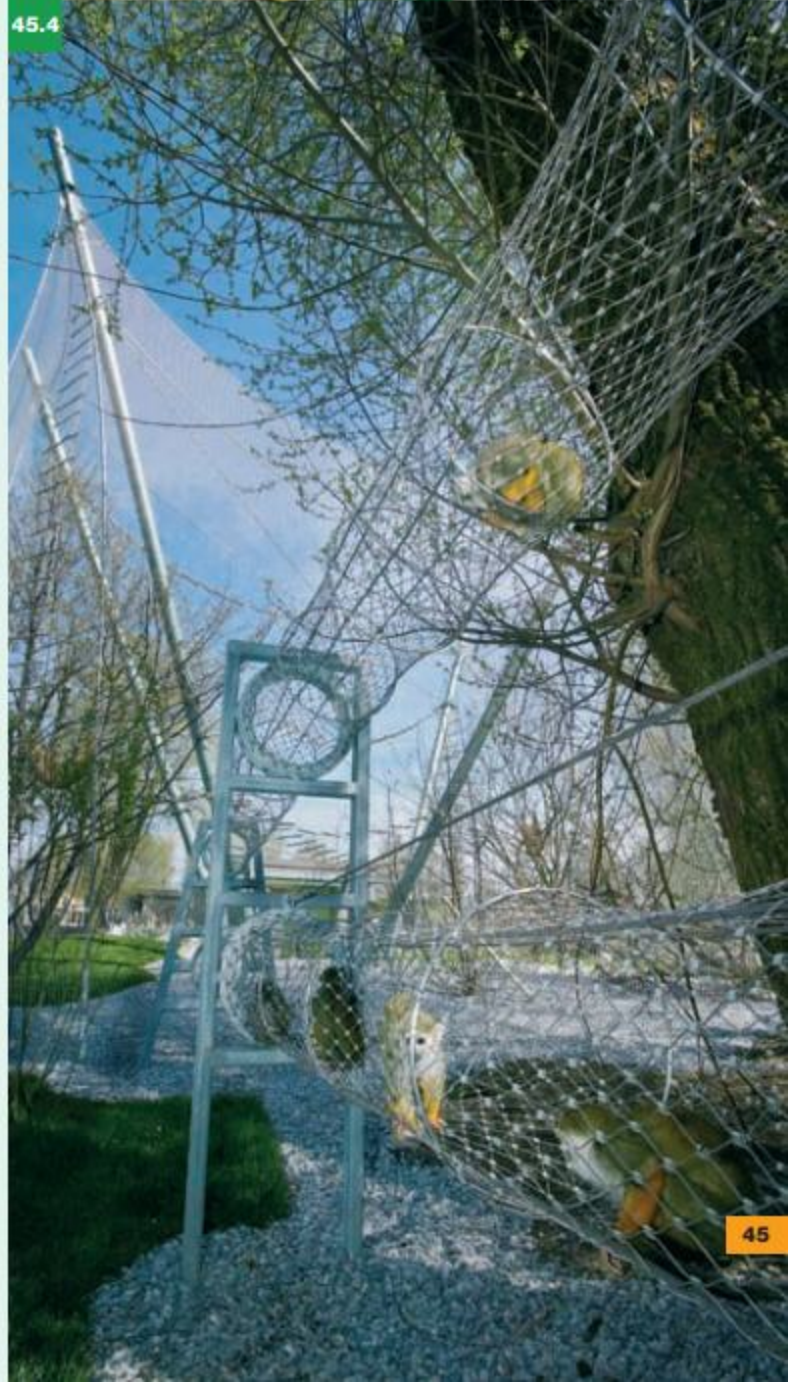

45.4

Webnet projections

Jakob AG can serve you with turnkey, all-in-one solutions. On request, you can also obtain separate services such as consulting and planning, engineering, or the assembly of complex wire-rope structures.

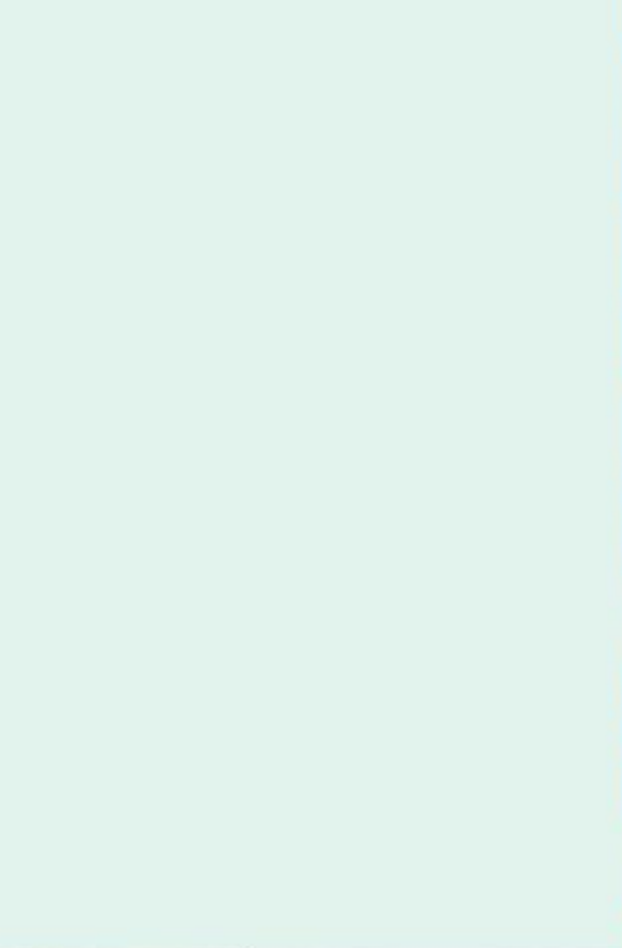

46.1


46.2

46.3



The **Jakob[®] INOX LINE Webnet** is ideal for **protective functions** and offers intelligent solutions for **attachment** and **perimeter design**.

Combined with architectural wire ropes and the acclaimed **Jakob[®] INOX LINE G1** greening system, its range of applications extends beyond protection and support, functioning as a **training system** for plants in façade greening applications. Additionally, the Webnet opens up completely new dimensions for the aesthetic design of multifunctional barriers or as "passive safety systems" wherever rugged but resilient fall-stopping nets are needed.

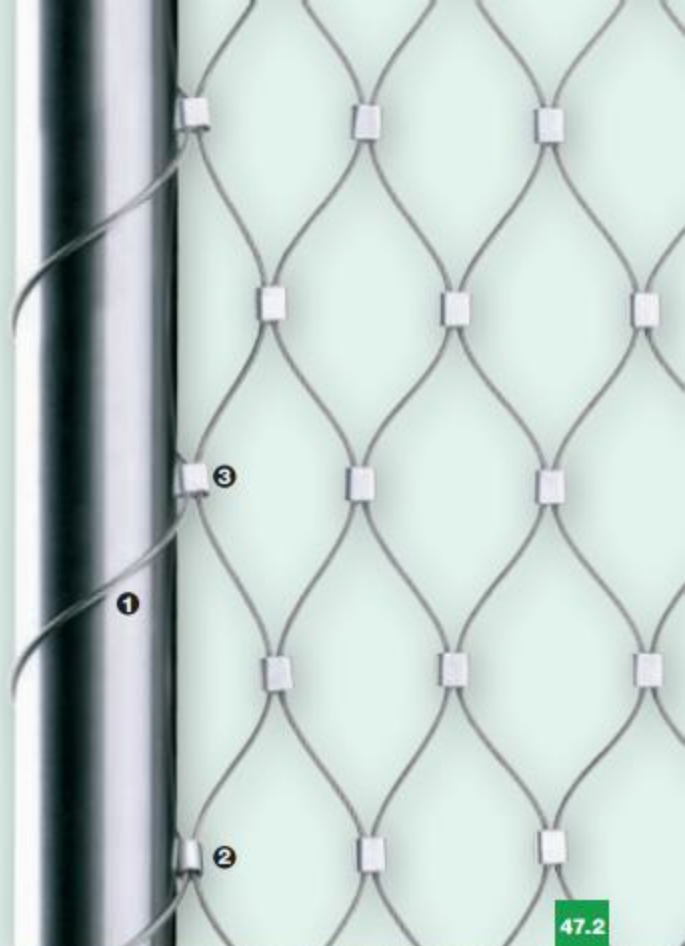

Left:

Webnet type A mounted on a tube with perimeter rope ① and hollow sleeves ②

The sleeves are swaged on site with a hand-operated tool ③

47.2

47.3



47.1



Rankhof Stadium, Basel (Switzerland)

- Webnet rope \varnothing 2.0 mm, mesh aperture 40 mm
- The Webnet can be retensioned in the horizontal direction


48.1



48.2



48.1

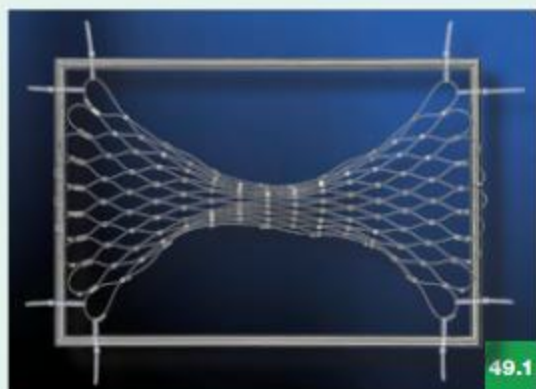

49.1



49.2



49.3



49.4




49.5




49.6



49.7

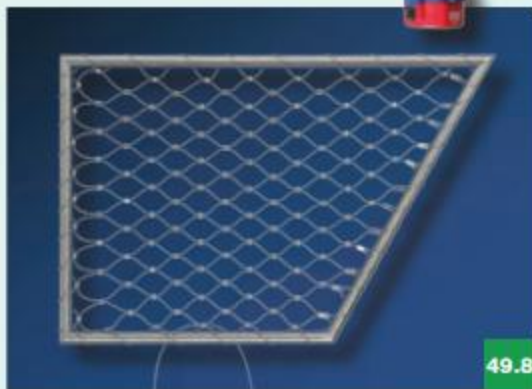

49.8

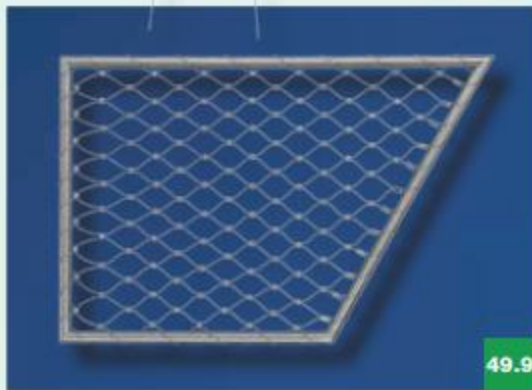

49.9



38 39

Webnet assembled in a rectangular tubular frame

Assembly example with horizontal meshes (**type A, H18**):

49.1 Center and attach Webnet at the four corners with cable ties.

49.2 Center and tension Webnet with cable ties.

49.3 On one half of the frame, thread perimeter rope from the middle of the top cross member to the middle of the bottom cross member, going through each Webnet sleeve and around the tubular frame opposite each sleeve. Thread in same direction throughout.

49.4 Thread perimeter rope on the other side of the frame as described in step 49.3. The ends of both perimeter ropes must be threaded through the last sleeve and then pulled taut. Now, all cable ties can be removed.

49.5 Swage the sleeves with the Webnet swaging tool, and cut off loose ends of the perimeter rope.

Webnet assembly in a trapezoidal tubular frame

Assembly example with horizontal meshes (**type A, H9**):


49.6 Center and tension Webnet with cable ties. Mark all cutoff points along and parallel to the skew side, and cut.

49.7 Use the battery-powered swaging tool to swage the Webnet eye ends onto the loose ends of the wire rope.

49.8 and 49.9 Same procedure as in figs. 49.4 and 49.5.



50.1

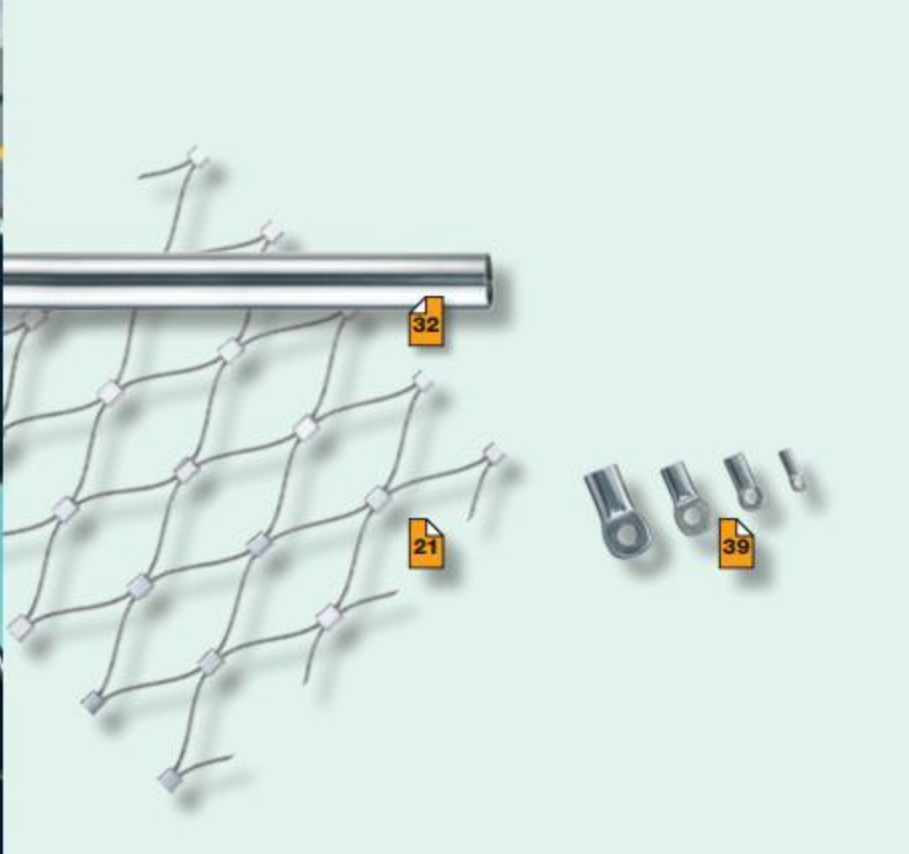

Diving tower, open-air pool in Burgdorf (Switzerland)

- Webnet rope \varnothing 1.5 mm, mesh aperture 100 mm



50.2

Welded Webnet tubular frame

Fully strung tubular frames according to your dimension sheets, with matching assembly accessories for attachment on the mounting structure.

What we need from you:

- dimensioned drawing of frame with tube \varnothing 17.2 or 269 mm
- Webnet order No. with rope \varnothing and mesh aperture **W**, type **A** or **B**
- vertical mesh **V** or horizontal mesh **H**
- number of tube holders and spacers
- description of mounting surface
- see ordering example on **page 19** and items on **page 33**



Fig. 51.1

Trapezoidal tubular frame with Webnet mesh **H**
Rope \varnothing 1.5 mm, mesh aperture 60 mm



Fig. 51.2


Rectangular tubular frame with Webnet mesh **H**
Rope \varnothing 1.5 mm, mesh aperture 60 mm



51.3



52.1



31

Design barriers, railings, and planar net structures with **Webnet**. The required periphery structure is created with suspension ropes and appropriate rope-end connectors. Further intelligent components such as suspension-rope clamps or connecting rods from the **Jakob® INOX LINE** series can be used to refine the Webnet periphery structure (see pages 30 to 36).



53.1

53.2



54.1



54.2



54.3


The **Jakob® INOX LINE Webnet** is ideal for elegant **protective nets** and offers intelligent solutions for **attachment** and **perimeter design**.



**Deutsches Museum, Transportation Center
Munich (Germany)**

- Suspension rope \varnothing 8.0 mm
- Webnet rope \varnothing 1.5 mm, mesh aperture 60 mm


55.1

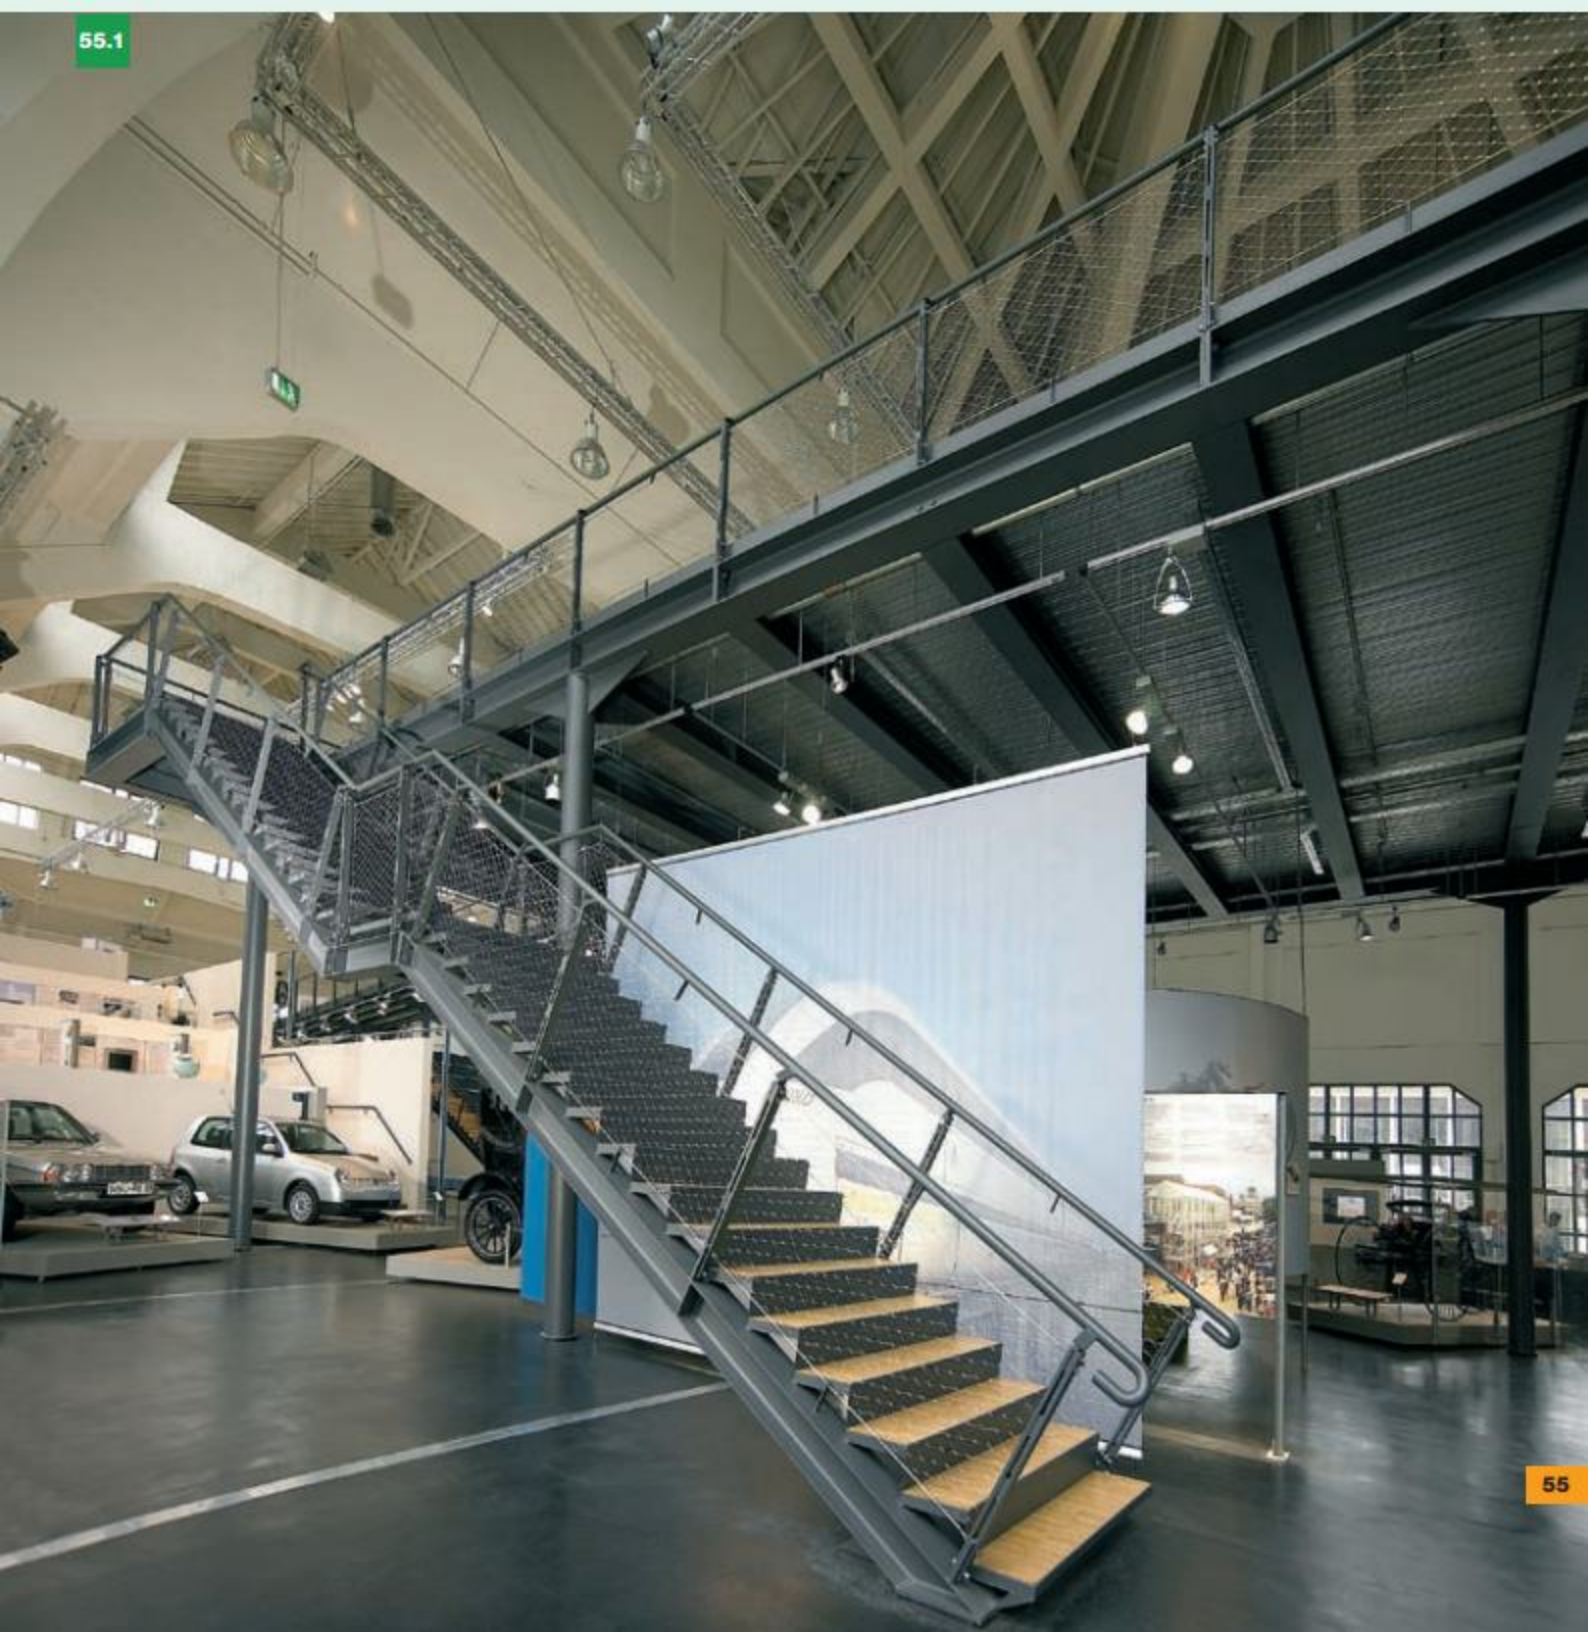




56.1



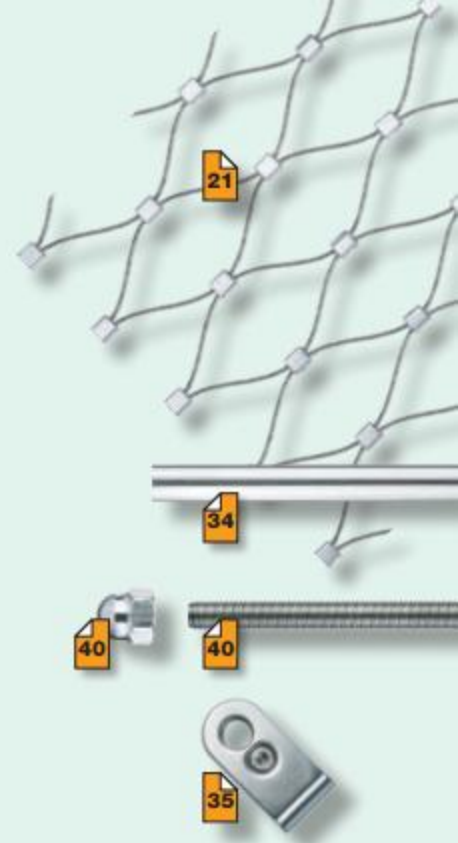

The **Webnet** can also be mounted along wavy and irregular surfaces, for instance quarry walls and natural stone walls. Loopholes can be prevented with contour adjustments.








The Jakob® INOX LINE Webnet was tested pursuant to EN 1263-1 for its static and dynamic load-bearing capacity.

Test data:

- **Webnet** size: length 7 m × width 5 m
- **Webnet** rope Ø 3.0 mm, mesh aperture 60 and 100 mm (horizontal and vertical meshes)
- **Webnet** rope Ø 2.0 mm, mesh aperture 60 and 100 mm (horizontal and vertical meshes)
- suspension rope Ø 10.0 mm
- test object: 500-mm steel sphere, mass 100 kg
- drop height of test object: 7 m

*Historic city wall, Münsterplattform, Bern (Switzerland)
Safety net as a discreet passive safety system*

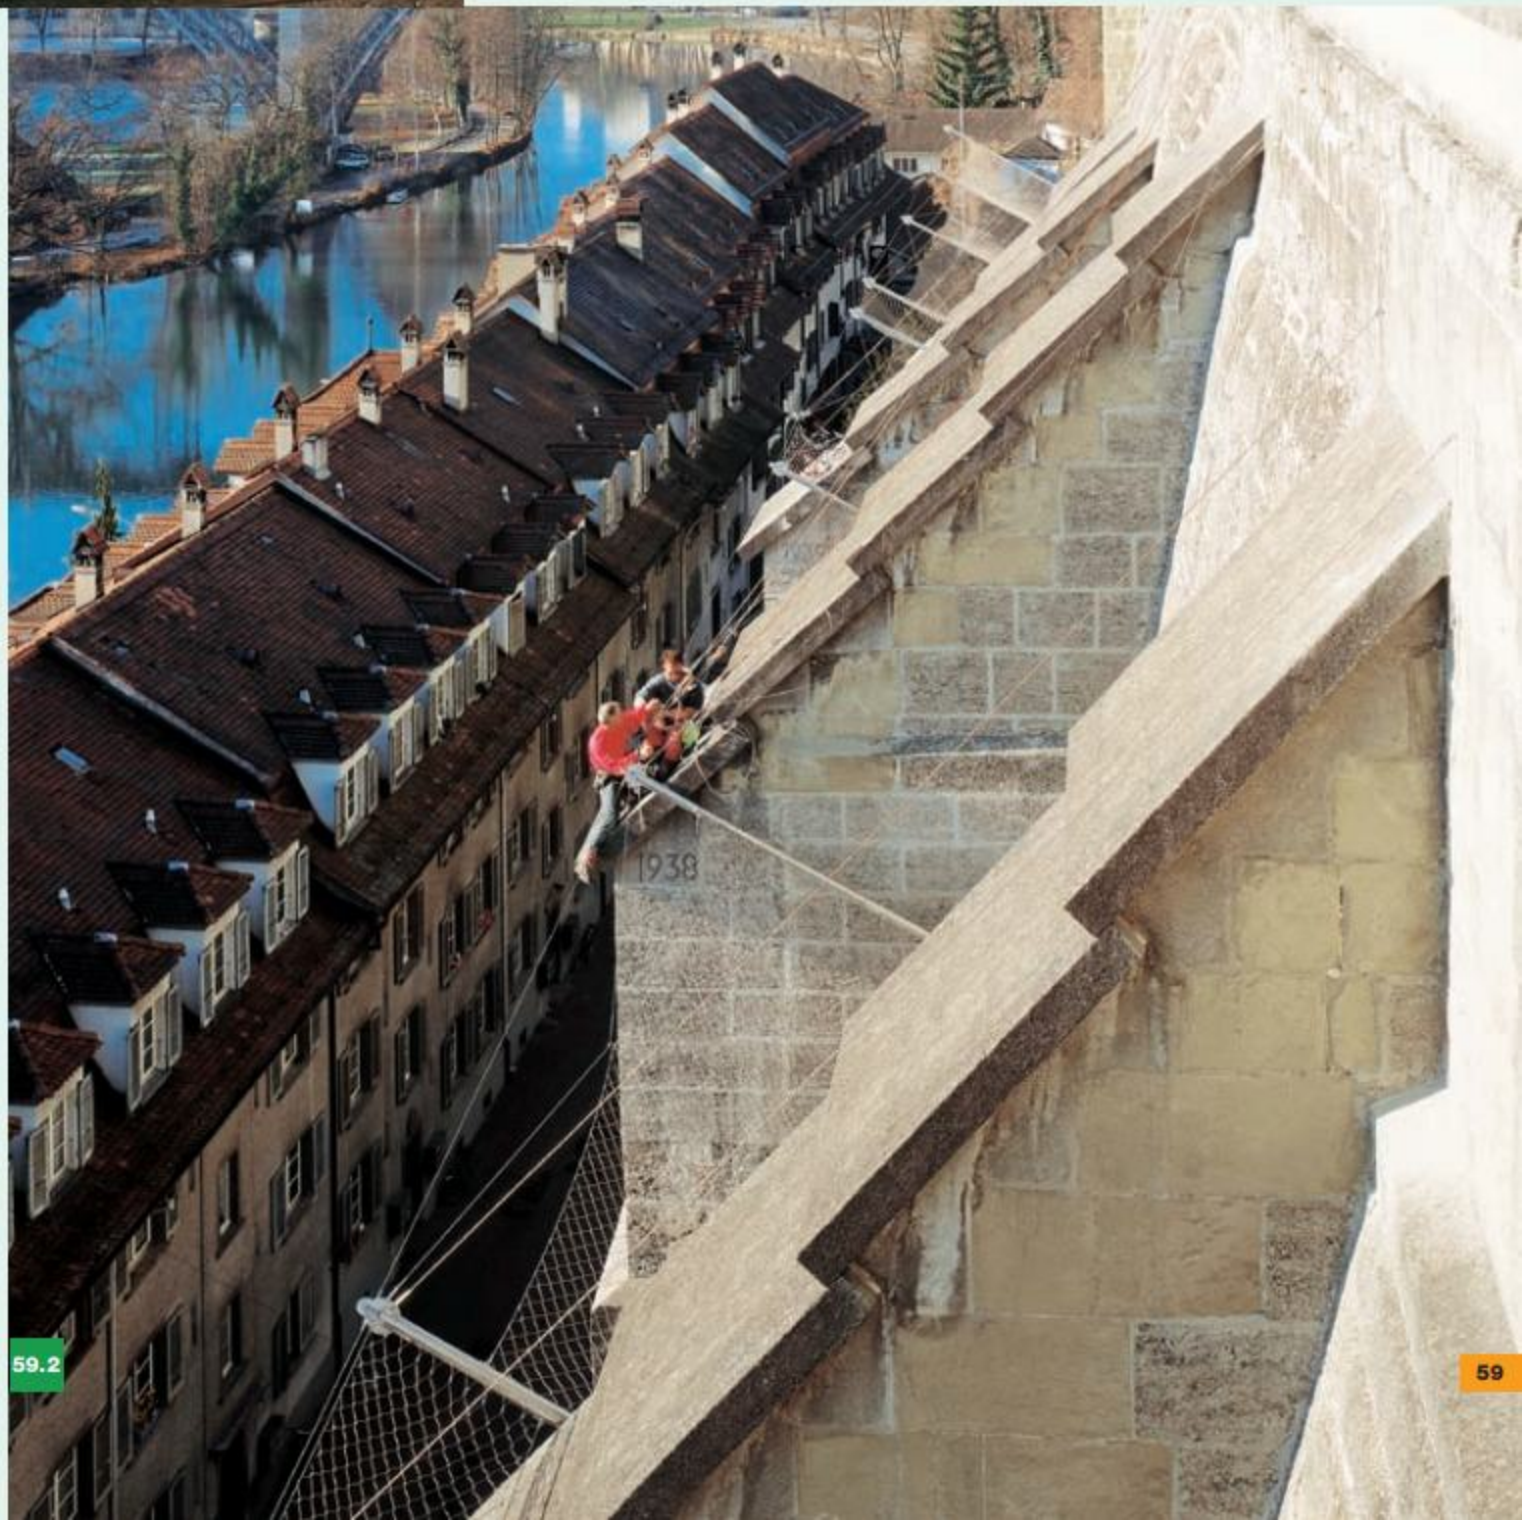

**Wooden bridge Sachseln-Kerns
(Switzerland)**

Safety net as a passive safety system

- Highest bridge of this type in Europe,
120 m above water level
- Suspension rope \varnothing 16.0 mm
- Webnet rope \varnothing 3.0 mm,
mesh aperture 100 mm



60.1



60.2




60.3





60.4



60.5

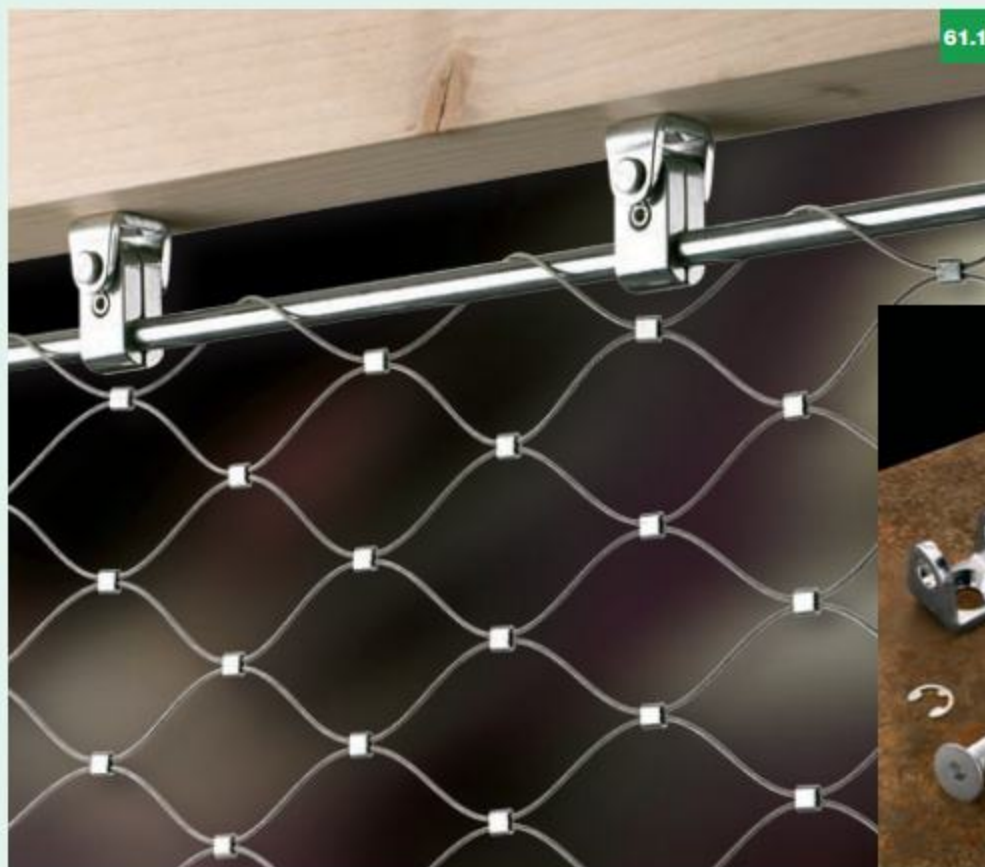

The **Jakob® INOX LINE rod system** in combination with **Webnet** sections offers a vast spectrum of configuration options that fulfill both technical and design requirements (see pages 34/35).

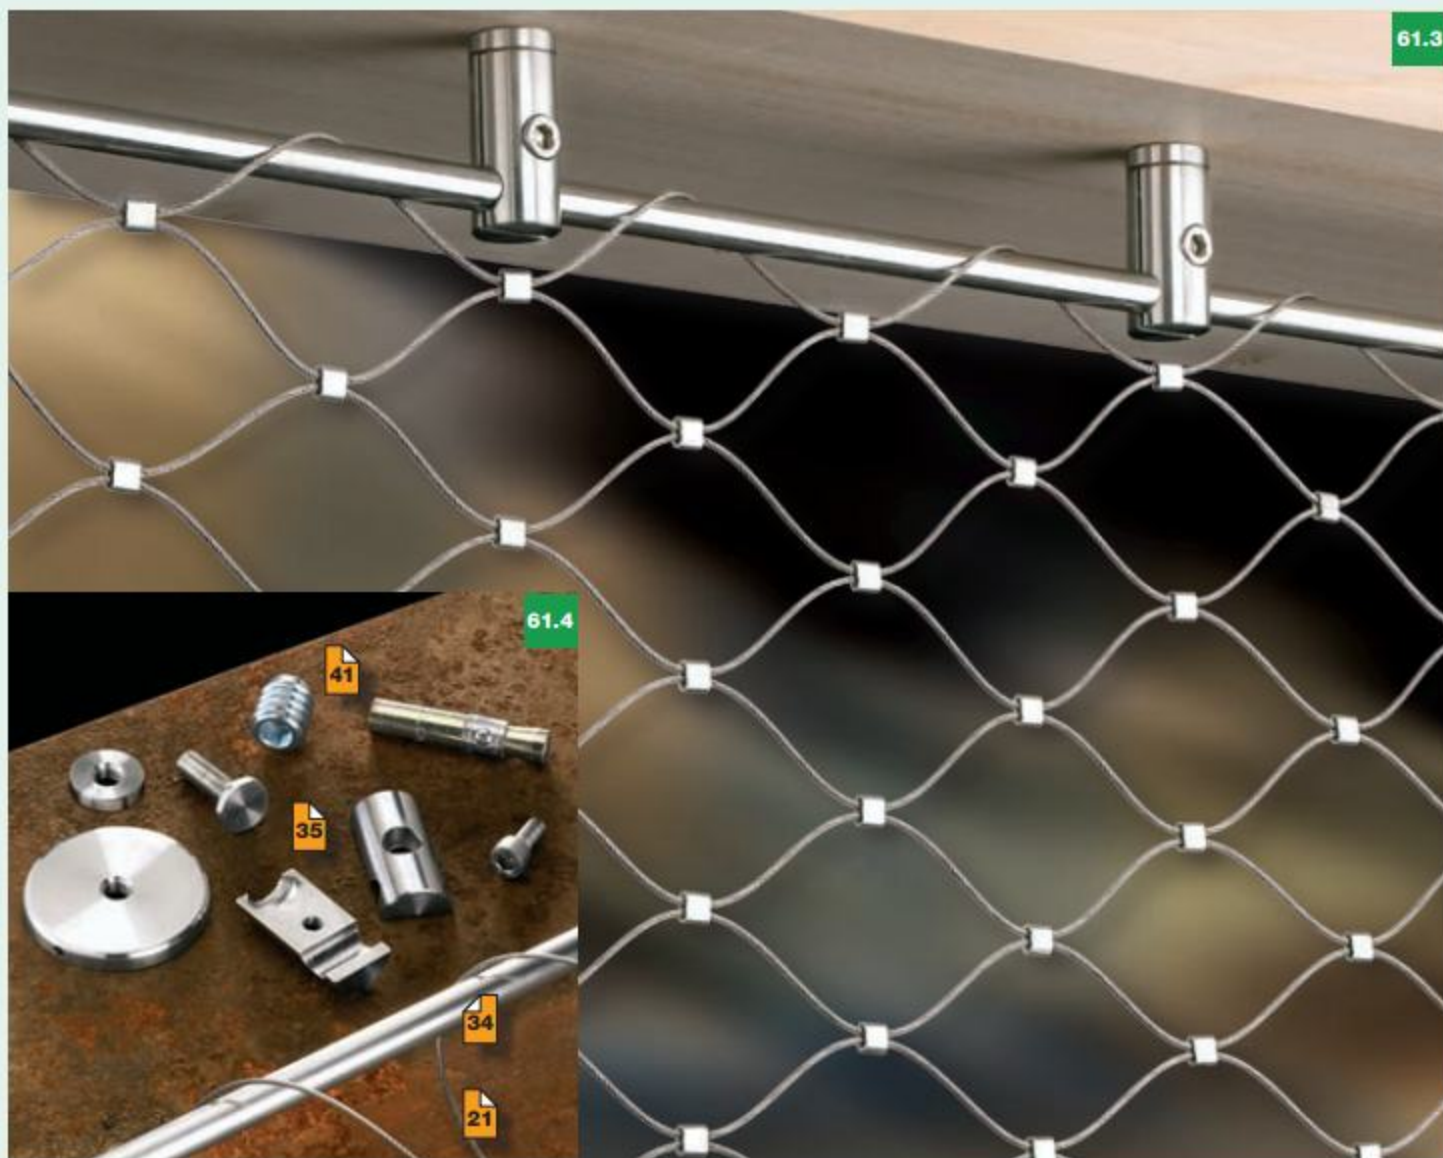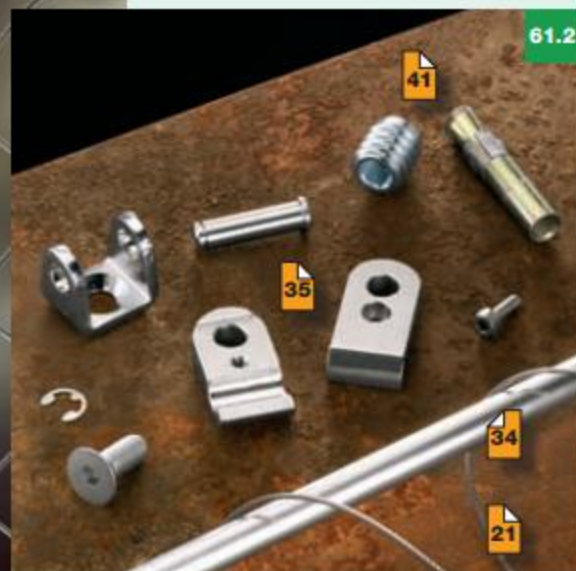




62.1






63.1

The **Jakob**® INOX LINE **rod system** in combination with **Webnet** sections offers a vast spectrum of configuration options that fulfill both technical and design requirements (see pages 34/35).



63.2



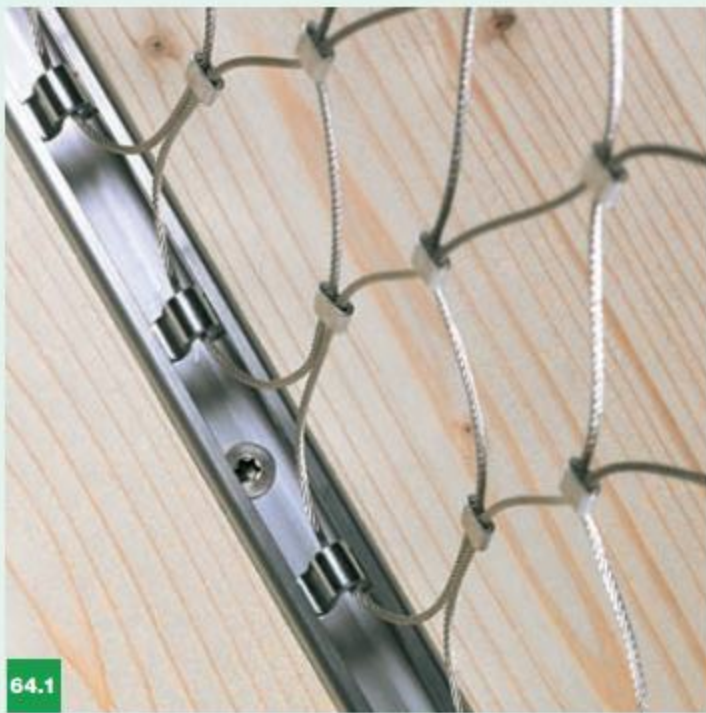

64.1



64.4



64.5



64.2



64.3



64.6

The **Jakob® INOX LINE C rail system** allows flush mounting of Webnet sections to structural surfaces. Four different C rail types are available for assembly on different kinds of substrates.

Combined with the **Jakob® INOX LINE rod system**, these rails allow the development of new and creative solutions with many configuration options (see pages 34 to 37).

**Overhead coverage
for Roman mosaic (CH)**

Protection device

- C rail, horizontal
- Holding rope \varnothing 6.0 mm, vertical
- Webnet rope \varnothing 2.0 mm,
Mesh aperture 140 mm
- Diagonal rod with clevis end M10



Wahlenpark, Zürich (CH)

Ball catcher net

- Webnet rope \varnothing 2,0 mm, mesh aperture 50 mm

Shading canopy

- Webnet rope \varnothing 1,5 mm, mesh aperture 30 mm
- Webnet size total: 600 m²



67.1

67.4

67.2

67.3



The so-called **moiré** (from French moirer: to marble) effect is achieved by superimposing two nets. It creates an interference pattern when two grids or sets of lines are overlaid at an angle.

Pedestrian crossing Simone de Beauvoir, Paris (F)

- Webnet rope \varnothing 3.0 mm, mesh aperture 80 mm
- Webnet size total: 1000 m²



69.1

69.2





70.1



70.2



Eiffel Tower, Paris (F)

Protection against urban climbers

- Webnet rope- \varnothing 1.5 mm, mesh aperture 30 mm



70.3



Parking garage Sihcity, Zürich (CH)

- Webnet rope \varnothing 1.5 mm, mesh aperture 40 mm
- Webnet size total: 1900 m²



Parking garage Sihcity, Zürich (CH)

Webnet structure as a closed cylinder


- Webnet rope \varnothing 1.5 mm, mesh aperture 40 mm
- Webnet size total: 1900 m²



73.1

73.2

73.3

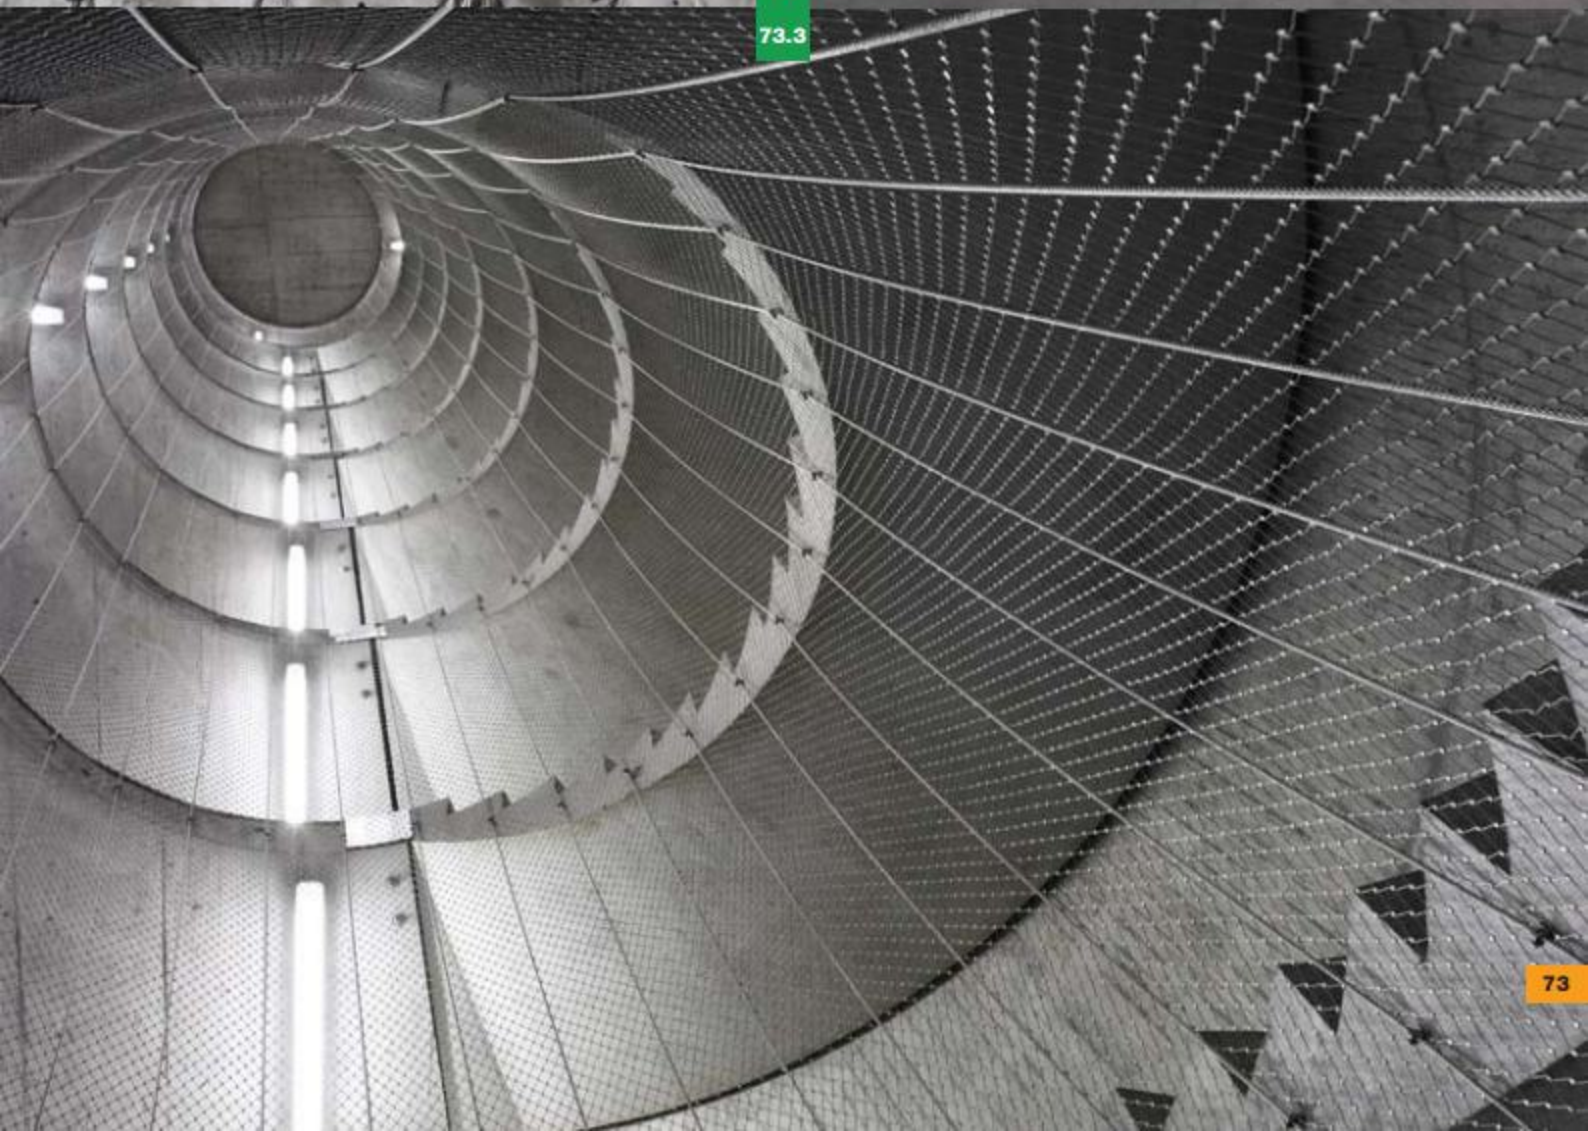



74.1

74.2



74.3

Staircase, Langnau i.E. (CH)

- Webnet rope \varnothing 1.5 mm, mesh aperture 40 mm
- Webnet size total: 57 m²



75.1

75.2



75.3



76.1

76.2

76.3

76.4

Krakow Zoo (PL)

Enclosures for animals

- Webnet rope \varnothing 2,0 und 3.0 mm, mesh aperture 80 mm
- Webnet size total: 1800 m²



77.1

77.2



77.3



79.2



79.3



Designers' Saturday, Langenthal (CH)

Webnet exhibit

- Webnet rope \varnothing 1.5 mm, mesh aperture 40 mm
- Webnet size total: 200 m²

79.1



The Crossnet by Jakob® INOX LINE


Crossnet stands for a sophisticated combination of stainless steel wire rope and connecting elements.

The new cross clamp is both elegant and unobtrusive. The ample configuration latitude provided by **Crossnet**, such as the variable mesh aperture in combination with our proven rope-end connectors, is a challenge to the imagination and will inspire new creations.



Crossnet 2 mm, No. 30586-0200

- Minimum mesh aperture: 40 mm
- Stainless steel stranded wire, \varnothing 2.0 mm, 1 x 19
- Stainless steel ropes, \varnothing 2.0 mm, 6 x 7 + WC or 6 x 19 + WC rope construction

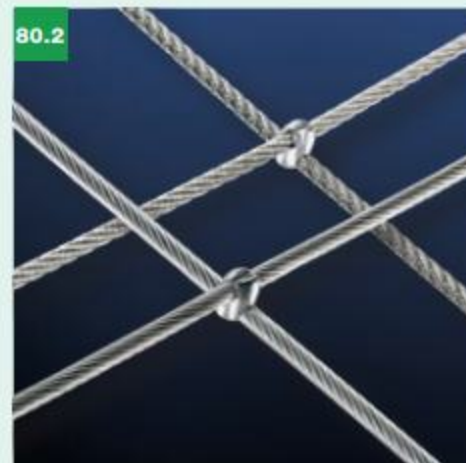


Crossnet 3 mm, No. 30586-0300

- Minimum mesh aperture: 40 mm
- Stainless steel stranded wire, \varnothing 3.0 mm, 1 x 19
- Stainless steel ropes, \varnothing 3.0 mm, 6 x 7 + WC or 6 x 19 + WC rope construction

Crossnet frames

The wire-rope and stranded-wire sections can be combined with the extensive selection of end connectors featured in the **Jakob® INOX LINE** range.

80.3

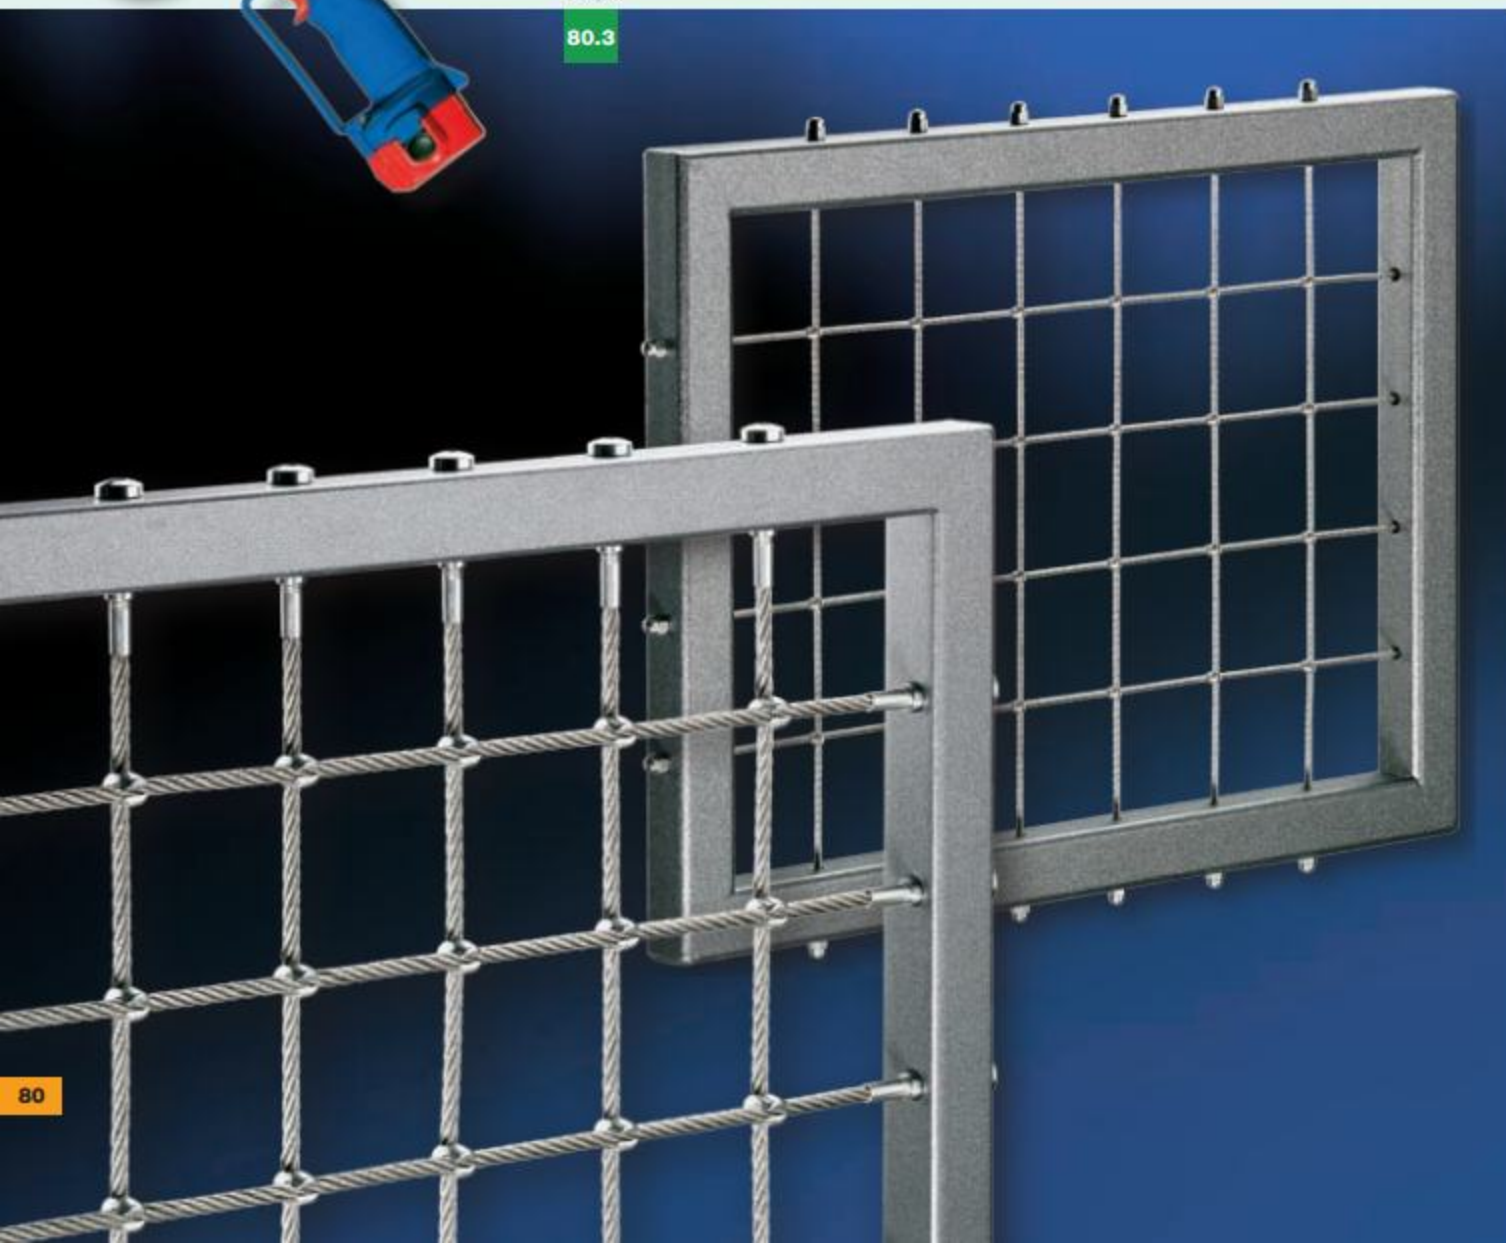



81.1

Crossnet 4 mm, No. 30586-0400

- Minimum mesh aperture: 60 mm
- Stainless steel stranded wire, Ø 4.0 mm, 1 x 19
- Stainless steel ropes, Ø 4.0 mm, 6 x 7 + WC or 6 x 19 + WC rope construction



81.2

Crossnet 5 mm, No. 30586-0500

- Minimum mesh aperture: 60 mm
- Stainless steel stranded wire, Ø 5.0 mm, 1 x 19
- Stainless steel ropes, Ø 5.0 mm, 6 x 7 + WC or 6 x 19 + WC rope construction



81.3

Crossnet 6 mm, No. 30586-0600

- Minimum mesh aperture: 60 mm
- Stainless steel stranded wire, Ø 6.0 mm, 1 x 19
- Stainless steel ropes, Ø 6.0 mm, 6 x 7 + WC or 6 x 19 + WC rope construction

Special Crossnet designs

A combination of stainless steel ropes and stranded wire, with different rope and strand diameters.



81.4



81.5